









In Situ database Analyses Report

Moorings

prepared by the Pi-MEP Consortium

December 15, 2022



Contents

1	Ove	erview
	1.1	In situ dataset
		1.1.1 Moorings
	1.2	Auxiliary geophysical datasets
		1.2.1 CMORPH
		1.2.2 ASCAT
		1.2.3 ISAS
		1.2.4 World Ocean Atlas Climatology
2	In S	Situ Dababase Analyses
	2.1	Number of SSS data as a function of time and distance to coast
	2.2	Histogram of SSS
	2.3	Temporal mean of shallowest salinity
	2.4	Temporal Std of shallowest salinity
	2.5	Number of shallowest salinity
		Time series of shallowest salinity



Acronym

Aquarius NASA/CONAE Salinity mission

ASCAT Advanced Scatterometer

ATBD Algorithm Theoretical Baseline Document

BLT Barrier Layer Thickness

CMORPH CPC MORPHing technique (precipitation analyses)

CPC Climate Prediction Center

CTD Instrument used to measure the conductivity, temperature, and pressure of

seawater

DM Delayed Mode
EO Earth Observation
ESA European Space Agency
FTP File Transfer Protocol

GOSUD Global Ocean Surface Underway Data
The Global Tropical Moored Buoy Array

Ifremer Institut français de recherche pour l'exploitation de la mer

IPEV Institut polaire français Paul-Émile Victor

 $egin{array}{ll} {
m IQR} & {
m Interquartile\ range} \\ {
m ISAS} & {
m In\ Situ\ Analysis\ System} \\ \end{array}$

Kurt Kurtosis (fourth central moment divided by fourth power of the standard de-

viation)

L2 Level 2

LEGOS Laboratoire d'Etudes en Géophysique et Océanographie Spatiales

LOCEAN Laboratoire d'Océanographie et du Climat : Expérimentations et Approches

Numériques

LOPS Laboratoire d'Océanographie Physique et Spatiale

MDB Match-up Data Base

MEOP Marine Mammals Exploring the Oceans Pole to Pole

MLD Mixed Layer Depth

NCEI National Centers for Environmental Information

NRT Near Real Time

NTAS Northwest Tropical Atlantic Station

OI Optimal interpolation

Pi-MEP Pilot-Mission Exploitation Platform

PIRATA Prediction and Researched Moored Array in the Atlantic

QC Quality control

 R_{sat} Spatial resolution of the satellite SSS product

RAMA Research Moored Array for African-Asian-Australian Monsoon Analysis and

Prediction

r² Square of the Pearson correlation coefficient

RMS Root mean square

RR Rain rate

SAMOS Shipboard Automated Meteorological and Oceanographic System

Skew Skewness (third central moment divided by the cube of the standard deviation)

SMAP Soil Moisture Active Passive (NASA mission)
SMOS Soil Moisture and Ocean Salinity (ESA mission)
SPURS Salinity Processes in the Upper Ocean Regional Study

SSS Sea Surface Salinity

 SSS_{insitu} In situ SSS data considered for the match-up



 SSS_{SAT} Satellite SSS product considered for the match-up

 Δ SSS Difference between satellite and in situ SSS at colocalized point (Δ SSS =

 SSS_{SAT} - SSS_{insitu})

SST Sea Surface Temperature Std Standard deviation

Std* Robust Standard deviation = median(abs(x-median(x)))/0.67 (less affected by

outliers than Std)

Stratus Surface buoy located in the eastern tropical Pacific

Survostral SURVeillance de l'Océan AuSTRAL (Monitoring the Southern Ocean)

TAO Tropical Atmosphere Ocean

TSG ThermoSalinoGraph

WHOI Woods Hole Oceanographic Institution
WHOTS WHOI Hawaii Ocean Time-series Station

WOA World Ocean Atlas



1 Overview

This report presents some characteristics of the Moorings in situ dataset used by the Pi-MEP to validate SMOS, SMAP and Aquarius satellite SSS products. A series of plots is proposed showing:

- Number of SSS data as a function of time and distance to coast
- Histogram of shallowest salinity and pressure (if relevant)
- Temporal mean of shallowest salinity and pressure (if relevant)
- Temporal STD of shallowest salinity
- Spatial density of shallowest salinity
- \bullet Δ SSS between local in situ data and ISAS analyses sorted as function of geophysical conditions
- Conditional analyses

The conditional analyses proposed in the document, correspond to filter/subdivide the different in situ datasets following specific geophysical conditions:

- C1:if the local value at in situ location of estimated rain rate is zero, mean daily wind is in the range [3, 12] m/s, the SST is > 5°C and distance to coast is > 800 km.
- C2:if the local value at in situ location of estimated rain rate is zero, mean daily wind is in the range [3, 12] m/s.
- C3:if the local value at in situ location of estimated rain rate is high (ie. > 1 mm/h) and mean daily wind is low (ie. < 4 m/s).
- C4:if the mixed layer is shallow with depth <20m.
- C5:if the in situ data is located where the climatological SSS standard deviation is low (ie. above < 0.2).
- C6:if the in situ data is located where the climatological SSS standard deviation is high (ie. above > 0.2).

For each conditions, the temporal mean (gridded over spatial boxes of size $1^{\circ}x1^{\circ}$) and the histogram of the difference ΔSSS between ISAS and in situ SSS value are presented. The use of ISAS (monthly SSS in situ analysed field) is motivated by the fact that it is used in the SMOS L2 official validation protocol in which systematic comparisons of SMOS L2 retrieved SSS with ISAS are done.

1.1 In situ dataset

1.1.1 Moorings

The Pi-MEP collects data from the Global Tropical Moored Buoy Array (GTMBA), a multinational effort to provide data in real-time for climate research and forecasting. Major components include the TAO/TRITON array in the Pacific, PIRATA in the Atlantic, and RAMA in the Indian Ocean. Data collected within TAO/TRITON, PIRATA and RAMA come primarily



from ATLAS and TRITON moorings. These two mooring systems are functionally equivalent in terms of sensors, sample rates, and data quality. The data are directly downloaded from ftp.pmel.noaa.gov every day and stored in the Pi-MEP. Only salinity data measured at 1 or 1.5 meter depth with standard (pre-deployment calibration applied) and highest quality (pre/post calibration in agreement) are considered. A careful filtering of suspiciously erroneous mooring salinity data when compared with all satellite data has also been performed (cf. presentation). The Pi-MEP project acknowledges the GTMBA Project Office of NOAA/PMEL for providing the data. Data from the Ocean Station PAPA are also added to the Pi-MEP in situ database.

From the Upper Ocean Processes Group at Woods Hole Oceanographic Institution (WHOI), several moorings data are also included in the Pi-MEP. Namely, delayed mode surface mooring salinity records under the stratus cloud deck in the eastern tropical Pacific (Stratus), in the trade wind region of the northwest tropical Atlantic (NTAS), 100 km north of Oahu at the WHOI Hawaii Ocean Time-series Site (WHOTS), in the salinity maximum region of the subtropical North Atlantic (SPURS-1) and in the Pacific intertropical convergence zone (SPURS-2).

1.2 Auxiliary geophysical datasets

Additional EO datasets are used to characterize the geophysical conditions at the in situ measurement locations and time, and 10 days prior to the measurements, to get an estimate of the geophysical concomitant condition and history. As discussed in Boutin et al. (2016), the presence of vertical gradients in, and horizontal variability of, sea surface salinity indeed complicates comparison of satellite and in situ measurements. The additional EO data are used here to get a first estimates of conditions for which L-band satellite SSS measured in the first centimeters of the upper ocean within a 50-150 km diameter footprint might differ from pointwise in situ measurements performed in general between 10 and 5 m depth below the surface. The spatiotemporal variability of SSS within a satellite footprint (50-150 km) is a major issue for satellite SSS validation in the vicinity of river plumes, frontal zones, and significant precipitation areas, among others. Rainfall can in some cases produce vertical salinity gradients exceeding 1 pss m⁻¹; consequently, it is recommended that satellite and in situ SSS measurements less than 3-6 h after rain events should be considered with care when used in satellite calibration/validation analyses. To identify such situation, the Pi-MEP platform is first using CMORPH products to characterize the local value and history of rain rate and ASCAT gridded data are used to characterize the local surface wind speed and history. For validation purpose, the ISAS monthly SSS in situ analysed fields at 5 m depth are collocated and compared with the in situ SSS value. The use of ISAS is motivated by the fact that it is used in the SMOS L2 official validation protocol in which systematic comparisons of SMOS L2 retrieved SSS with ISAS are done. In complement to ISAS, annual std climatological field from the World Ocean Atlas (WOA13) at the in situ location are also used to have an a priori information of the local SSS variability.

1.2.1 CMORPH

Precipitation are estimated using the CMORPH 3-hourly products at 1/4° resolution (Joyce et al. (2004)). CMORPH (CPC MORPHing technique) produces global precipitation analyses at very high spatial and temporal resolution. This technique uses precipitation estimates that have been derived from low orbiter satellite microwave observations exclusively, and whose features are transported via spatial propagation information that is obtained entirely from geostationary satellite IR data. At present NOAA incorporate precipitation estimates derived from the passive microwaves aboard the DMSP 13, 14 and 15 (SSM/I), the NOAA-15, 16, 17 and 18 (AMSU-B), and AMSR-E and TMI aboard NASA's Aqua, TRMM and GPM spacecraft,



respectively. These estimates are generated by algorithms of Ferraro (1997) for SSM/I, Ferraro et al. (2000) for AMSU-B and Kummerow et al. (2001) for TMI. Note that this technique is not a precipitation estimation algorithm but a means by which estimates from existing microwave rainfall algorithms can be combined. Therefore, this method is extremely flexible such that any precipitation estimates from any microwave satellite source can be incorporated.

With regard to spatial resolution, although the precipitation estimates are available on a grid with a spacing of 8 km (at the equator), the resolution of the individual satellite-derived estimates is coarser than that - more on the order of 12×15 km or so. The finer "resolution" is obtained via interpolation.

In effect, IR data are used as a means to transport the microwave-derived precipitation features during periods when microwave data are not available at a location. Propagation vector matrices are produced by computing spatial lag correlations on successive images of geostationary satellite IR which are then used to propagate the microwave derived precipitation estimates. This process governs the movement of the precipitation features only. At a given location, the shape and intensity of the precipitation features in the intervening half hour periods between microwave scans are determined by performing a time-weighting interpolation between microwave-derived features that have been propagated forward in time from the previous microwave observation and those that have been propagated backward in time from the following microwave scan. NOAA refer to this latter step as "morphing" of the features.

For the present Pi-MEP products, we only considered the 3-hourly products at 1/4 degree resolution. The entire CMORPH record (December 2002-present) for 3-hourly, 1/4 degree lat/lon resolution can be found at: ftp://ftp.cpc.ncep.noaa.gov/precip/CMORPH_V1. O/CRT/. CMORPH estimates cover a global belt (-180°W to 180°E) extending from 60°S to 60°N latitude and are available for the complete period of the Pi-MEP core datasets (Jan 2010-now).

1.2.2 ASCAT

Advanced SCATterometer (ASCAT) daily data produced and made available at Ifremer/CERSAT on a 0.25°x0.25° resolution grid (Bentamy and Fillon (2012)) since March 2007 are used to characterize the mean daily wind at the match-up pair location as well as the wind history during the 10-days period preceding the in situ measurement date. These wind fields are calculated based on a geostatistical method with external drift. Remotely sensed data from ASCAT are considered as observations while those from numerical model analysis (ECMWF) are associated with the external drift. The spatial and temporal structure functions for wind speed, zonal and meridional wind components are estimated from ASCAT retrievals. Furthermore, the new procedure includes a temporal interpolation of the retrievals based on the complex empirical orthogonal function (CEOF) approach, in order to enhance the sampling length of the scatterometer observations. The resulting daily wind fields involves the main known surface wind patterns as well as some variation modes associated with temporal and spatial moving features. The accuracy of the gridded winds was investigated through comparisons with moored buoy data in Bentamy et al. (2012) and resulted in rms differences for wind speed and direction are about 1.50 m.s⁻¹ and 20°.

1.2.3 ISAS

The In Situ Analysis System (ISAS), as described in Gaillard et al. (2016) is a data based reanalysis of temperature and salinity fields over the global ocean $70^{\circ}\text{N}-70^{\circ}\text{S}$ on a $1/2^{\circ}$ grid. It was initially designed to synthesize the temperature and salinity profiles collected by the Argo program. It has been later extended to accommodate all type of vertical profile as well as time series. ISAS gridded fields are entirely based on *in situ* measurements. The methodology



and configuration have been conceived to preserve as much as possible the data information content and resolution. ISAS is developed and run in a research laboratory (LOPS) in close collaboration with Coriolis, one of Argo Global Data Assembly Center and unique data provider for the Mercator operational oceanography system. In Pi-MEP, the products used are the IN-SITU_GLO_TS_OA_REP_OBSERVATIONS_013_002_b for the period 2010 to 2019 and the IN-SITU_GLO_TS_OA_NRT_OBSERVATIONS_013_002_a for the Near-Real Time (2020-2021) derived at the Coriolis data center and provided by the Copernicus Marine Environment Monitoring Service (CMEMS). The major contribution to the data set is from Argo array of profiling floats, reaching an approximate resolution of one profile every 10-days and every 3-degrees over the satellite SSS period (http://www.umr-lops.fr/SNO-Argo/Products/ISAS-T-S-fields/); in this version SSS from ship of opportunity thermosalinographs are not used, so that we can consider SMOS SSS validation using these measurements independent of ISAS. The ISAS optimal interpolation involves a structure function modeled as the sum of two Gaussian functions, each associated with specific time and space scales, resulting in a smoothing over typically 3 degrees. The smallest scale which can be retrieved with ISAS analysis is not smaller than 300–500 km (Kolodziejczyk et al. (2015)). For validation purpose, the ISAS monthly SSS fields at 5 m depth are collocated and compared with the satellite SSS products and included in the Pi-MEP Match-up files. In addition, the "percentage of variance" fields (PCTVAR) contained in the ISAS analyses provide information on the local variability of in situ SSS measurements within $1/2^{\circ} x 1/2^{\circ}$ boxes.

1.2.4 World Ocean Atlas Climatology

The World Ocean Atlas 2013 version 2 (WOA13 V2) is a set of objectively analyzed (1° grid) climatological fields of *in situ* temperature, salinity and other variables provided at standard depth levels for annual, seasonal, and monthly compositing periods for the World Ocean. It also includes associated statistical fields of observed oceanographic profile data interpolated to standard depth levels on 5° , 1° , and 0.25° grids. We use these fields in complement to ISAS to characterize the climatological fields (annual mean and std) at the match-up pairs location and date.

2 In Situ Dababase Analyses

2.1 Number of SSS data as a function of time and distance to coast

Figure 1 shows the time (a) and distance to coast (b) distributions of the Moorings $in \ situ$ dataset.



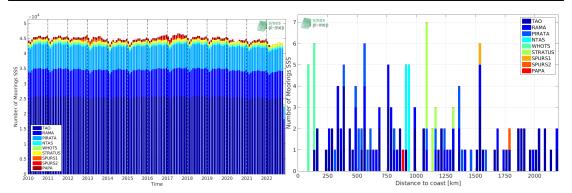


Figure 1: Number of SSS from Moorings as a function of time (left) and distance to coast (right).

2.2 Histogram of SSS

Figure 2 shows the SSS distribution of the Moorings.

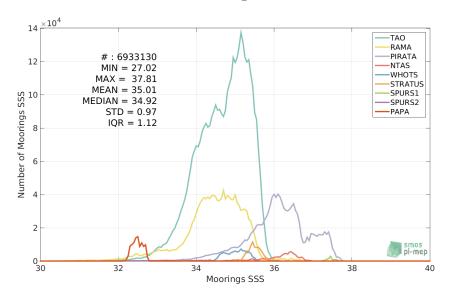


Figure 2: Distribution of SSS from Moorings per bins of 0.1.

2.3 Temporal mean of shallowest salinity

Figure 3 show a map of the mooring locations and the color of each circle indicates the temporal mean calculated using the full time series from 2010 to now of each mooring.



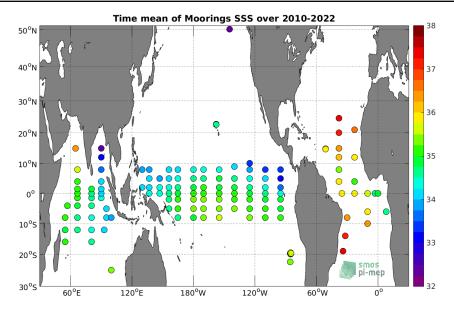


Figure 3: Temporal mean SSS from Moorings.

2.4 Temporal Std of shallowest salinity

Figure 4 show maps of the mooring locations and the color of each circle indicates the temporal standard deviation calculated using the full time series from 2010 to now of each mooring.


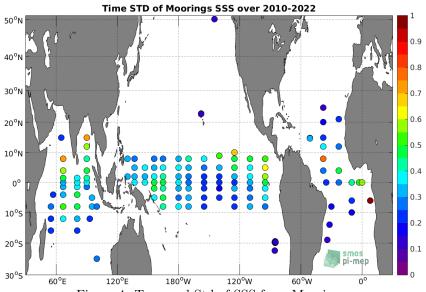


Figure 4: Temporal Std of SSS from Moorings.

2.5 Number of shallowest salinity

Figure 5 show maps of the mooring locations and the color of each circle indicates the number of SSS data measured by each mooring from 2010 to now.



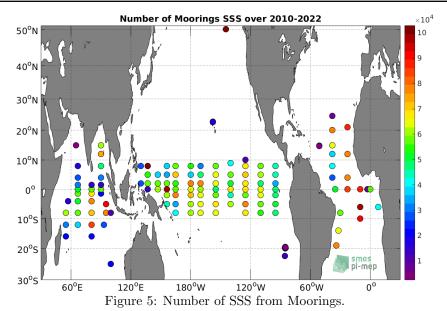

2.6 Time series of shallowest salinity

The following figures (6) show time series of shallowest salinity for each mooring. To switch from a mooring to another, you can play with the arrows between the plot and the caption.

Figure 6: Time series of SSS from Moorings



References

- Abderrahim Bentamy and Denis Croize Fillon. Gridded surface wind fields from Metop/ASCAT measurements. *Int. J. Remote Sens.*, 33(6):1729–1754, March 2012. ISSN 1366-5901. doi: 10.1080/01431161.2011.600348.
- Abderrahim Bentamy, Semyon A. Grodsky, James A. Carton, Denis Croizé-Fillon, and Bertrand Chapron. Matching ASCAT and QuikSCAT winds. *J. Geophys. Res.*, 117(C2), February 2012. ISSN 0148-0227. doi: 10.1029/2011JC007479.
- Jaqueline Boutin, Y. Chao, W. E. Asher, T. Delcroix, R. Drucker, K. Drushka, N. Kolodziejczyk, T. Lee, N. Reul, G. Reverdin, J. Schanze, A. Soloviev, L. Yu, J. Anderson, L. Brucker, E. Dinnat, A. S. Garcia, W. L. Jones, C. Maes, T. Meissner, W. Tang, N. Vinogradova, and B. Ward. Satellite and In Situ Salinity: Understanding Near-Surface Stratification and Sub-footprint Variability. Bull. Am. Meterol. Soc., 97(8):1391–1407, 2016. ISSN 1520-0477. doi: 10.1175/bams-d-15-00032.1.
- Ralph R. Ferraro. SSM/I derived global rainfall estimates for climatological applications. *J. Geophys. Res.*, 102(D14):16715–16736, 07 1997. doi: 10.1029/97JD01210.
- Ralph R. Ferraro, Fuzhong Weng, Norman C. Grody, and Limin Zhao. Precipitation characteristics over land from the NOAA-15 AMSU sensor. *Geophys. Res. Lett.*, 27(17):2669–2672, 2000. doi: 10.1029/2000GL011665.
- Fabienne Gaillard, Thierry Reynaud, Virginie Thierry, Nicolas Kolodziejczyk, and Karina von Schuckmann. In Situ-Based Reanalysis of the Global Ocean Temperature and Salinity with ISAS: Variability of the Heat Content and Steric Height. *J. Clim.*, 29(4):1305–1323, February 2016. ISSN 1520-0442. doi: 10.1175/jcli-d-15-0028.1.
- Robert J. Joyce, John E. Janowiak, Phillip A. Arkin, and Pingping Xie. CMORPH: A Method that Produces Global Precipitation Estimates from Passive Microwave and Infrared Data at High Spatial and Temporal Resolution. *J. Hydrometeorol.*, 5(3):487–503, June 2004. doi: 10.1175/1525-7541(2004)005\(0487:\)camtpg\(2.0.\)co;2.
- Nicolas Kolodziejczyk, Gilles Reverdin, and Alban Lazar. Interannual Variability of the Mixed Layer Winter Convection and Spice Injection in the Eastern Subtropical North Atlantic. *J. Phys. Oceanogr.*, 45(2):504–525, Feb 2015. ISSN 1520-0485. doi: 10.1175/jpo-d-14-0042.1.
- Christian Kummerow, Y. Hong, W. S. Olson, S. Yang, R. F. Adler, J. McCollum, R. Ferraro, G. Petty, D-B. Shin, and T. T. Wilheit. The Evolution of the Goddard Profiling Algorithm (GPROF) for Rainfall Estimation from Passive Microwave Sensors. *J. Appl. Meteorol.*, 40(11): 1801–1820, 2001. doi: 10.1175/1520-0450(2001)040(1801:TEOTGP)2.0.CO;2.