









Match-up database Analyses Report

SMOS SSS L2 v700 (ESA)

Waveglider

SPURS 2

prepared by the Pi-MEP Consortium

June 15, 2021

Contents

1	Ove	erview
2	The	MDB file datasets
	2.1	Satellite SSS product
		2.1.1 SMOS SSS L2 v700 (ESA)
	2.2	In situ SSS dataset
	2.3	Auxiliary geophysical datasets
		2.3.1 CMORPH
		2.3.2 ASCAT
		2.3.3 ISAS
		2.3.4 World Ocean Atlas Climatology
	2.4	Overview of the Match-ups generation method
		2.4.1 In situ/Satellite data filtering
		2.4.2 In situ/Satellite Co-localization
		2.4.3 MDB pair Co-localization with auxiliary data and complementary infor-
		mation
		2.4.4 Content of the Match-Up NetCDF files
	2.5	MDB characteristics for the particular in situ/satellite pairs
	2.0	2.5.1 Number of paired SSS data as a function of time and distance to coast
		2.5.2 Histograms of the SSS match-ups
		2.5.3 Spatial Distribution of Match-ups
		2.5.4 Histograms of the spatial and temporal lags of the match-ups pairs
		2.5.4 Histograms of the spatial and temporal lags of the match-ups pairs
3	MD	B file Analyses
	3.1	Spatial Maps of the Temporal mean and Std of in situ and satellite SSS and of
		the difference (Δ SSS)
	3.2	Time series of the monthly median and Std of in situ and satellite SSS and of the
		difference (Δ SSS)
	3.3	Zonal mean and Std of in situ and satellite SSS and of the difference (Δ SSS)
	3.4	Scatterplots of satellite vs in situ SSS by latitudinal bands
	3.5	Time series of the monthly median and Std of Δ SSS sorted by latitudinal bands
	3.6	Δ SSS sorted as function of geophysical parameters
	3.7	Δ SSS maps and statistics for different geophysical conditions
	C	
1	Sun	nmary
5		re Comparison/Validation Materials
		Comparisons with other satellite products
	5.2	Statistics derived for the different in situ databases
L	ist (of Figures
_		
	1	Number of match-ups between Waveglider and SMOS SSS L2 v700 (ESA) SSS as
		a function of time (a) and as function of the distance to coast (b) over the SPURS
		2 Pi-MEP region and for the full satellite product period

2	Histograms of SSS from Waveglider (a) and SMOS SSS L2 v700 (ESA) (b) considering all match-up pairs per bins of 0.1 over the SPURS 2 Pi-MEP region and	
3	for the full satellite product period	21
4	(ESA) SSS product for the SPURS 2 Pi-MEP region over 1°x1° boxes and for the full satellite product period	22
4	the Waveglider measurement and the date of the corresponding SMOS SSS L2 v700 (ESA) SSS pixel	23
5	Temporal mean (left) and Std (right) of SSS from SMOS SSS L2 v700 (ESA) (top), Waveglider (middle), and of Δ SSS (Satellite - Waveglider). Only match-up pairs are used to generate these maps.	24
6	Time series of the monthly median SSS (top), median of Δ SSS (Satellite - Waveglider) and Std of Δ SSS (Satellite - Waveglider) over the SPURS 2 Pi-MEP region	21
7	considering all match-ups collected by the Pi-MEP	25
8	satellite product period	26
9	root mean square (RMS) and the mean bias between satellite and in situ data are indicated for each latitude band in each plots	27
10	$40^{\circ}\text{S}-20^{\circ}\text{S}$ and $20^{\circ}\text{N}-40^{\circ}\text{N}$ and (d) $60^{\circ}\text{S}-40^{\circ}\text{S}$ and $40^{\circ}\text{N}-60^{\circ}\text{N}$	28
11	the red curves and black vertical thick bars (± 1 Std) Temporal mean gridded over spatial boxes of size 1°x1° of Δ SSS (SMOS SSS L2 v700 (ESA) - Waveglider) for 5 different subdatasets corresponding to:RR=0 mm/h, $3 < U_{10} < 12$ m/s, SST>5°C, distance to coast > 800 km (a), RR=0 mm/h, $3 < U_{10} < 12$ m/s (b), RR>1mm/h and $U_{10} < 4$ m/s (c), WOA2013 SSS Std<0.2	29
12	(d), WOA2013 SSS Std>0.2 (e)	30
	and $U_{10} < 4\text{m/s}$ (c), WOA2013 SSS Std < 0.2 (d), WOA2013 SSS Std > 0.2 (e)	31



Acronym

Aquarius NASA/CONAE Salinity mission

ASCAT Advanced Scatterometer

ATBD Algorithm Theoretical Baseline Document

BLT Barrier Layer Thickness

CMORPH CPC MORPHing technique (precipitation analyses)

CPC Climate Prediction Center

CTD Instrument used to measure the conductivity, temperature, and pressure of

seawater

DM Delayed Mode
EO Earth Observation
ESA European Space Agency
FTP File Transfer Protocol

GOSUD Global Ocean Surface Underway Data
The Global Tropical Moored Buoy Array

Ifremer Institut français de recherche pour l'exploitation de la mer

IPEV Institut polaire français Paul-Émile Victor

IQR Interquartile range ISAS In Situ Analysis System

Kurt Kurtosis (fourth central moment divided by fourth power of the standard de-

viation)

L2 Level 2

LEGOS Laboratoire d'Etudes en Géophysique et Océanographie Spatiales

LOCEAN Laboratoire d'Océanographie et du Climat : Expérimentations et Approches

Numériques

LOPS Laboratoire d'Océanographie Physique et Spatiale

MDB Match-up Data Base

MEOP Marine Mammals Exploring the Oceans Pole to Pole

MLD Mixed Layer Depth

NCEI National Centers for Environmental Information

NRT Near Real Time

NTAS Northwest Tropical Atlantic Station

OI Optimal interpolation

Pi-MEP Pilot-Mission Exploitation Platform

PIRATA Prediction and Researched Moored Array in the Atlantic

QC Quality control

 R_{sat} Spatial resolution of the satellite SSS product

RAMA Research Moored Array for African-Asian-Australian Monsoon Analysis and

Prediction

r² Square of the Pearson correlation coefficient

RMS Root mean square

RR Rain rate

SAMOS Shipboard Automated Meteorological and Oceanographic System

Skew Skewness (third central moment divided by the cube of the standard deviation)

SMAP Soil Moisture Active Passive (NASA mission)
SMOS Soil Moisture and Ocean Salinity (ESA mission)
SPURS Salinity Processes in the Upper Ocean Regional Study

SSS Sea Surface Salinity

 SSS_{insitu} In situ SSS data considered for the match-up



 ${
m SSS}_{SAT}$ Satellite SSS product considered for the match-up

 Δ SSS Difference between satellite and in situ SSS at colocalized point (Δ SSS =

 SSS_{SAT} - SSS_{insitu})

SST Sea Surface Temperature Std Standard deviation

Std* Robust Standard deviation = median(abs(x-median(x)))/0.67 (less affected by

outliers than Std)

Stratus Surface buoy located in the eastern tropical Pacific

Survostral SURVeillance de l'Océan AuSTRAL (Monitoring the Southern Ocean)

TAO Tropical Atmosphere Ocean

TSG ThermoSalinoGraph

WHOI Woods Hole Oceanographic Institution
WHOTS WHOI Hawaii Ocean Time-series Station

WOA World Ocean Atlas



1 Overview

In this report, we present systematic analyses of the Match-up DataBase (MDB) files generated by the Pi-MEP platform within the following Pi-MEP region and for the below pair of Satellite/in situ SSS data:

- Pi-MEP region: SPURS 2 (download the corresponding mask in NetCDF here)
- SSS satellite product (SSS $_{SAT}$): SMOS SSS L2 v700 (ESA)
- In situ dataset (SSS_{Insitu}): Waveglider (download the corresponding in situ report here)

In the following, $\Delta SSS = SSS_{SAT}$ - SSS_{Insitu} denotes the difference between the satellite and in situ SSS at the colocalized points that form the MDB.

This report presents successively:

The MDB file DataSets (Section 2)

- A short description of the satellite SSS product considered in the match-up (2.1)
- A short description of the in situ SSS dataset considered in the match-up (2.2)
- A short description of the auxiliary geophysical datasets co-localized with SSS pairs (2.3)
- An overview of how the Match-ups were evaluated (2.4)
- An overview of the MDB characteristics for the particular in situ/satellite pairs (2.5)

The major results of the MDB file Analyses (Section 3)

- Spatial Maps of the Time-mean and temporal Std of in situ and satellite SSS and of the ΔSSS (3.1)
- Time series of the monthly median and Std of in situ and satellite SSS and of the Δ SSS (3.2)
- Zonal mean and Std of in situ and satellite SSS and of the Δ SSS (3.3)
- \bullet Scatterplots of satellite vs in situ SSS by latitudinal bands (3.4)
- Time series of the monthly median and Std of the Δ SSS sorted by latitudinal bands (3.5)
- Δ SSS sorted as function of geophysical parameters (3.6)
- Δ SSS maps and statistics for different geophysical conditions (3.7)

All analyses are conducted over the Pi-MEP Region specified above and over the full satellite SSS product period. Original figures appearing in this report can be downloaded as PNG files here or by clicking directly on the figure.



2 The MDB file datasets

2.1 Satellite SSS product

2.1.1 SMOS SSS L2 v700 (ESA)

Quality and major features of the SMOS Level 2 Sea Surface Salinity data products generated by version 700 of the Level 2OS Operational Processor (L2OS) can be found in the SMOS-Level-2-Ocean-Salinity-v700-release-note. Version 700 of the Level 2 Sea Surface Salinity data product is available for the SMOS mission lifetime with the following file class and version:

File class	File version	From	То
REPR	v700	1 June 2010	24 Mai 2021
OPER	v700	25 Mai 2021	present

Measurements from the commissioning phase (12 January 2010 - 31 May 2010) show drifts due to instrument tests taking place during this period. Even though data are available (upon request) it is not advisable to use them. The SMOS data users are invited to use this new data set, which supersedes the previous one generated by the algorithm baseline version 662 and to read this note carefully to ensure optimal exploitation of the version 700 data set. Further information on the quality of the dataset can be found in the reprocessing verification report and in the validations report (available from June 2021 onwards) here.

Main improvements in the L2OS version 700 data set

The major improvements introduced in the currently operational version 700 of the SMOS Level 2 sea surface salinity processor are:

- 1. The SSS anomaly field has been substantially revisited. The fields present in the version v662 of the products were obtained by simply subtracting the climatological SSS value contained in WOA2009 from the retrieved SMOS SSS values. Since v700, the SSS anomaly is computed against a SMOS-derived SSS climatology using 7 years of SSS retrievals (2013-2019). In order to improve quality, the SMOS-derived climatology corrects also for part of the systematic biases found in the SMOS SSS retrievals (such as land contamination). A full description of the method to produce the SMOS-based climatology appears in the section 2.2.9 of the TGRD document (see references in this release note).
- 2. The Somaraju and Trumpf (ST) seawater dielectric constant model has been now introduced to replace Klein and Swift's dielectric constant model that was used in the previous versions of the algorithm to estimate the specular sea surface emissivity and thus retrieve salinity. The ST model has been tuned to minimize SMOS limitations found in the SSS retrievals with the original model of ST and to improve SSS retrieval quality in cold waters with respect the Klein and Swift's dielectric constant model. This was achieved with the support of the cardioid parameters provided along with the UDP products (so called, Acard field). Further information can be found in the section 4.1.4 of the ATBD as well as in Boutin et al. (2020) (see references of this release note)
- 3. The procedure to compute the Ocean Target Transform (OTT) for systematic instrumental bias correction has now improved. In particular, a more stringent filtering is applied to reduce the level of noise in the OTT, especially in the upper part of the AF-FOV. The novel filtering stabilizes the OTT which becomes less impacted by Radio Frequency Interferences



(RFI) or errors due to TEC variations. Further details are provided in section 5.8.3 of the ATBD (see references of this release note).

- 4. The estimation of the theoretical retrieval error has also been improved and now is more representative of the true error. This change impacts the values of the UDP fields Sigma_SSS_corr, Sigma_SSS_uncorr, and Sigma_SSS_anom. For further details, reader is invited to check section 4.11.2 of the ATBD (see references of this release note).
- 5. An improved correction for the Land/Sea Contamination (LSC) has also now been introduced to reduce SSS retrievals biases in areas located at distances less than 1,000 km from the nearest coasts. The main differences with respect v662 is that the new method makes use of an improved reference SSS to derive the correction. Specifically, the In Situ Analysis System (ISAS-15; Gaillard et al. (2016)) derived fields are used instead of the World Ocean Atlas (WOA) Climatology fields used in previous version. A stricter RFI filtering and a gap-filling method based on an empirical convolution kernel are also applied in this latest LSC correction. These changes are meant to reduce the impact of the limitations from previous version, where areas with high natural dynamics or impacted frequently by RFI were not well represented in the correction(particularly in the tropical Atlantic). Further information is found in the section 2.2.8 of the TGRD (see references of this release note).
- 6. The flags defined to estimate the impact of sea-state conditions on SSS retrieval quality have been now revisited. Six flags called Fg_sc_sea_state_n, with n=1, ...,6, are present in the UDP files, which can be combined to filter SSS retrievals according to sea-state. These flags are based on threshold values of inverse wave eight (Omega) and swell fraction which have been now better defined and corrected to represent more accurately the presence of young seas, old seas, and swell, correspondingly. The worst SSS quality is observed for Fg_sc_sea_state_1(wind sea dominated old seas) and Fg_sc_sea_state_5 (wind sea dominated young sea state). Data acquired in these conditions are less reliable.
- 7. SMOS SSS retrievals from version 662 were obtained including a novel sun glint correction. The sun glint is estimated as a combination of the sun L-band radiation reflection in the ocean's surface and the impact of the surface roughness in the scattering of the signal. The modelled brightness temperature associated to sun glint within the SMOS scenes is calculated and included as part of the geophysical model function for the retrieval. In the version 700, the source of solar L-band radio fluxes has been modified, replacing the previously used rescaled Penticton datasets with an inter-calibrated L-band solar flux from on-ground radio-telescope rescaled for optimal SMOS data processing. This has proved to be a more accurate source of L-band solar fluxes for the purposes of the mission. For further details, readers are directed to section 2.4.6 and Annex A.3 from TGRD (see references of this release note).
- 8. Updated configuration of switches and filters used in the data processing. For further information see the section 2.4.7 of the TGRD (see references of this release note).

The L2OS version 700 data set has been generated using a newly recalibrated L1c dataset of SMOS MIRAS Brightness Temperatures (version 724). For further details on the L1c data sets see the L1c data version 724 read-me-first note available here.

L2OS version 700 performance and caveats

The reprocessed data set has been analysed by ESLs and ARGANS. The reference document is mentioned above. The main conclusions are:



- Land-sea contamination corrected salinities (SSS_corr) almost cancel the global mean bias in near-to-coast regions (> 40 km and < 800 km) as compared to SSS_uncorr. Caveats found in previous version in the tropical Atlantic Ocean and in the high northern latitudes have disappeared.
- On SSS_uncorr, land-sea contamination is still present, but with different across track signatures and it is less variable across swath.
- High latitudes of the southern hemisphere: the new dielectric constant model corrects for most positive SSS biases in descending orbits during March-August period. However, due to remaining contamination of other origin (likely sea ice contamination), positive biases still remain for the rest of the year. On ascending orbits, negative biases \sim - 0.5 pss are observed all the year round.
- The new salinity anomaly product exhibit reduced systematic errors (such as land-sea contamination) compared with the previous anomaly fields which used WOA climatology as a reference. Nevertheless, systematic seasonal latitudinal errors are not corrected in this version and generate artefacts.
- Ascending-descending differences in retrieved SSS remain, but they are more homogeneous spatially than in the previous version. We noticed stronger sea-ice contamination in the southern ocean on ascending orbits than in previous version.

Filtering retrievals

We strongly recommend users to filter L2OS sea surface salinity retrievals using the procedure detailed below. The list of flags recommended to use for data filtering is as follows:

Table 1: List of recommended flags

Flag	Rejection condition
Fg_ctrl_ecmwf	0
Fg_ctrl_num_meas_min	1
Fg_ctrl_num_meas_low	1
Fg_ctrl_many_outliers	1
$Fg_ctrl_sunglinT$	1
Fg_ctrl_moonglint	1
Fg_ctrl_reach_maxiter	1
Fg_ctrl_marq	1
Fg_ctrl_chi2	1
Fg_ctrl_chi2_p	1
Fg_ctrol_gal_noise	1
Fg_ctrl_suspect_rfi	1
Fg_sc_low_wind	0
Fg_sc_land_sea_coast1	0
Fg_sc_ice	1
Fg_sc_suspect_ice	1
Fg_sc_sea_state_1	1
Fg_sc_sea_state_5	1



Full description of the flags appears in the SMOS Level 2 and Auxiliary Data Products Specifications document (see references at the end of the document). In addition, the following parameters can be controlled via threshold to retain only the best data: Dg_af_fov > 130. Note that these filter strategies offer the best quality results, but with a significant reduction of valid grid points. Users may consider relaxing some of the criteria to improve spatial coverage. For instance, the use of Dg_af_fov (typically spamming from 0 to 256 measurements) has the side effect of clipping the sides of the orbits, reducing the width of the track in the orbit to approximately 700 kms. By selecting the recommended criteria, users are selecting grid points that have been obtained primarily from measurements situated in the Alias-Free Field of View (AF-FOV) of the SMOS snapshots, which penalizes grid points with a larger proportion of measurements from the Extended AF-FOV (EAF-FOV).

Flags used before MDB files generation

We only select data in the MDB files such as the following conditions or flags are met:

• $Dg_af_fov > 130$

• control_flag_set: CTRL_ECMWF

• control_flag_clear: CTRL_NUM_MEAS_MIN, CTRL_NUM_MEAS_LOW, CTRL_MANY_OUTLIERS, CTRL_SUNGLINT, CTRL_MOONGLINT, CTRL_REACH_MAXITER, CTRL_MARQ, CTRL_CHI2_P, CTRL_SUSPECT_RFI

• science_flag_set: SC_LOW_WIND, SC_LAND_SEA_COAST1

• science_flag_clear: SC_ICE, SC_SUSPECT_ICE

Satellite SSS product characteristics

Table 2: Satellite SSS product characteristics

SMOS SSS L2 v700 (ESA)							
Spatial resolution	~40 km						
Temporal repeat	3 days						
Temporal coverage	From 2010-06-01 to now						
Spatial coverage	Global [-180 180 -90 90]						
Data Provider	ESA						
Version	700						
ATBD	SMOS_L2OS-ATBD						
Data access	level-2-ocean-salinity						

2.2 In situ SSS dataset

A Waveglider is an autonomous platform propelled by the conversion of ocean wave energy into forward thrust and employing solar panels to power instrumentation. For SPURS-2, sensors included a CTD at the near-surface and another at 6 m depth, providing continuous salinity and temperature observations plus air temperature and wind measurements. Three wavegliders (https://doi.org/10.5067/SPUR2-GLID3) were deployed from the Revelle in August 2016 and



again in November 2017 before final retrieval at the conclusion on the second cruise. Waveglider trajectories followed a 20x20km square loop around the moorings and a butterfly pattern around the neutrally-buoyant float. Focused around a central mooring located near 10°N,125°W, the objective of SPURS-2 (NASA-funded oceanographic process study) was to study the dynamics of the rainfall-dominated surface ocean at the western edge of the eastern Pacific fresh pool subject to high seasonal variability and strong zonal flows associated with the North Equatorial Current and Countercurrent.

2.3 Auxiliary geophysical datasets

Additional EO datasets are used to characterize the geophysical conditions at the in situ/satellite SSS pair measurement locations and time, and 10 days prior the measurements to get an estimate of the geophysical condition and history. As discussed in Boutin et al. (2016), the presence of vertical gradients in, and horizontal variability of, sea surface salinity indeed complicates comparison of satellite and in situ measurements. The additional EO data are used here to get a first estimates of conditions for which L-band satellite SSS measured in the first centimeters of the upper ocean within a 50-150 km diameter footprint might differ from pointwise in situ measurements performed in general between 10 and 5 m depth below the surface. The spatiotemporal variability of SSS within a satellite footprint (50–150 km) is a major issue for satellite SSS validation in the vicinity of river plumes, frontal zones, and significant precipitation. Rainfall can in some cases produce vertical salinity gradients exceeding 1 pss m⁻¹; consequently, it is recommended that satellite and in situ SSS measurements less than 3-6 h after rain events should be considered with care when used in satellite calibration/validation analyses. To identify such situation, the Pi-MEP platform is first using CMORPH products to characterize the local value and history of rain rate and ASCAT gridded data are used to characterize the local surface wind speed and history. For validation purpose, the ISAS monthly SSS in situ analysed fields at 5 m depth are collocated and compared with the satellite SSS products. The use of ISAS is motivated by the fact that it is used in the SMOS L2 official validation protocol in which systematic comparisons of SMOS L2 retrieved SSS with ISAS are done. In complement to ISAS, monthly std climatological fields from the World Ocean Atlas (WOA13) at the match-up pairs location and date are also used to have an a priori information of the local SSS variability.

2.3.1 CMORPH

Precipitation are estimated using the CMORPH 3-hourly products at 1/4° resolution (Joyce et al. (2004)). CMORPH (CPC MORPHing technique) produces global precipitation analyses at very high spatial and temporal resolution. This technique uses precipitation estimates that have been derived from low orbiter satellite microwave observations exclusively, and whose features are transported via spatial propagation information that is obtained entirely from geostationary satellite IR data. At present NOAA incorporate precipitation estimates derived from the passive microwaves aboard the DMSP 13, 14 and 15 (SSM/I), the NOAA-15, 16, 17 and 18 (AMSU-B), and AMSR-E and TMI aboard NASA's Aqua, TRMM and GPM spacecraft, respectively. These estimates are generated by algorithms of Ferraro (1997) for SSM/I, Ferraro et al. (2000) for AMSU-B and Kummerow et al. (2001) for TMI. Note that this technique is not a precipitation estimation algorithm but a means by which estimates from existing microwave rainfall algorithms can be combined. Therefore, this method is extremely flexible such that any precipitation estimates from any microwave satellite source can be incorporated.

With regard to spatial resolution, although the precipitation estimates are available on a grid with a spacing of 8 km (at the equator), the resolution of the individual satellite-derived



estimates is coarser than that - more on the order of 12×15 km or so. The finer "resolution" is obtained via interpolation.

In effect, IR data are used as a means to transport the microwave-derived precipitation features during periods when microwave data are not available at a location. Propagation vector matrices are produced by computing spatial lag correlations on successive images of geostationary satellite IR which are then used to propagate the microwave derived precipitation estimates. This process governs the movement of the precipitation features only. At a given location, the shape and intensity of the precipitation features in the intervening half hour periods between microwave scans are determined by performing a time-weighting interpolation between microwave-derived features that have been propagated forward in time from the previous microwave observation and those that have been propagated backward in time from the following microwave scan. NOAA refer to this latter step as "morphing" of the features.

For the present Pi-MEP products, we only considered the 3-hourly products at 1/4 degree resolution. The entire CMORPH record (December 2002-present) for 3-hourly, 1/4 degree lat/lon resolution can be found at: ftp://ftp.cpc.ncep.noaa.gov/precip/CMORPH_V1. O/CRT/. CMORPH estimates cover a global belt (-180°W to 180°E) extending from 60°S to 60°N latitude and are available for the complete period of the Pi-MEP core datasets (Jan 2010-now).

2.3.2 ASCAT

Advanced SCATterometer (ASCAT) daily data produced and made available at Ifremer/CERSAT on a 0.25°x0.25° resolution grid (Bentamy and Fillon (2012)) since March 2007 are used to characterize the mean daily wind at the match-up pair location as well as the wind history during the 10-days period preceding the in situ measurement date. These wind fields are calculated based on a geostatistical method with external drift. Remotely sensed data from ASCAT are considered as observations while those from numerical model analysis (ECMWF) are associated with the external drift. The spatial and temporal structure functions for wind speed, zonal and meridional wind components are estimated from ASCAT retrievals. Furthermore, the new procedure includes a temporal interpolation of the retrievals based on the complex empirical orthogonal function (CEOF) approach, in order to enhance the sampling length of the scatterometer observations. The resulting daily wind fields involves the main known surface wind patterns as well as some variation modes associated with temporal and spatial moving features. The accuracy of the gridded winds was investigated through comparisons with moored buoy data in Bentamy et al. (2012) and resulted in rms differences for wind speed and direction are about 1.50 m.s⁻¹ and 20°.

2.3.3 ISAS

The In Situ Analysis System (ISAS), as described in Gaillard et al. (2016) is a data based reanalysis of temperature and salinity fields over the global ocean 70°N–70°S on a 1/2° grid. It was initially designed to synthesize the temperature and salinity profiles collected by the Argo program. It has been later extended to accommodate all type of vertical profile as well as time series. ISAS gridded fields are entirely based on in situ measurements. The methodology and configuration have been conceived to preserve as much as possible the data information content and resolution. ISAS is developed and run in a research laboratory (LOPS) in close collaboration with Coriolis, one of Argo Global Data Assembly Center and unique data provider for the Mercator operational oceanography system. In Pi-MEP, the products in used are the INSITU_GLO_TS_OA_REP_OBSERVATIONS_013_002_b for the period 2010 to 2019 and INSITU_GLO_TS_OA_NRT_OBSERVATIONS_013_002_a for the Near-Real Time (2020-2021) derived at the Coriolis data center and provided by the Copernicus Marine Environment Monitor-



ing Service (CMEMS). The major contribution to the data set is from Argo array of profiling floats, reaching an approximate resolution of one profile every 10-days and every 3-degrees over the satellite SSS period (http://www.umr-lops.fr/SNO-Argo/Products/ISAS-T-S-fields/); in this version SSS from ship of opportunity thermosalinographs are not used, so that we can consider SMOS SSS validation using these measurements independent of ISAS. The ISAS optimal interpolation involves a structure function modeled as the sum of two Gaussian functions, each associated with specific time and space scales, resulting in a smoothing over typically 3 degrees. The smallest scale which can be retrieved with ISAS analysis is not smaller than 300–500 km (Kolodziejczyk et al. (2015)). For validation purpose, the ISAS monthly SSS fields at 5 m depth are collocated and compared with the satellite SSS products and included in the Pi-MEP Match-up files. In addition, the "percentage of variance" fields (PCTVAR) contained in the ISAS analyses provide information on the local variability of in situ SSS measurements within 1/2°x1/2° boxes.

2.3.4 World Ocean Atlas Climatology

The World Ocean Atlas 2013 version 2 (WOA13 V2) is a set of objectively analyzed (1° grid) climatological fields of *in situ* temperature, salinity and other variables provided at standard depth levels for annual, seasonal, and monthly compositing periods for the World Ocean. It also includes associated statistical fields of observed oceanographic profile data interpolated to standard depth levels on 5° , 1° , and 0.25° grids. We use these fields in complement to ISAS to characterize the climatological fields (annual mean and std) at the match-up pairs location and date.

2.4 Overview of the Match-ups generation method

The match-up production is basically a three steps process:

- 1. preparation of the input in situ and satellite data, and,
- 2. co-localization of satellite products with in situ SSS measurements.
- 3. co-localization of the in situ/satellite pair with auxiliary information.

In the following, we successively detail the approaches taken for these different steps.

2.4.1 In situ/Satellite data filtering

The first step consists in filtering Waveglider *in situ* data using the quality flags as described in 2.2 so that only valid salinity data remain in the final match-up files.

For high-spatial resolution in situ SSS measurements such as the Thermo-SalinoGraph (TSG) SSS data, as well as SSS data from surface drifters, an additional spatial filtering step is performed on the in situ data that will be in fine compared to the satellite SSS products. If R_{sat} is the spatial resolution of the satellite SSS product (L2 to L3-L4), the in situ data are spatially low pass filtered using a running median filter with a window width= R_{sat} to try to minimize the spatial representativeness uncertainty when comparing to the lower spatial resolution of the satellite SSS product. Both original and filtered in situ data are finally stored in the MDB files.

Only for satellite L2 SSS data, a third step consist in filtering spurious data using the flags and associated recommendation as provided by the official data centers and described in 2.1.



2.4.2 In situ/Satellite Co-localization

In this step, each SSS satellite acquisition is co-localized with the filtered *in situ* measurements. The method used for co-localization differ if the satellite SSS is a swath product (so-called Level 2-types) or a time-space composite product (so-called Level 3/level 4-types).

• For L2 SSS swath data:

If R_{sat} is the spatial resolution of the satellite swath SSS product, for each in situ data sample collected in the Pi-MEP database, the platform searches for all satellite SSS data found at grid nodes located within a radius of $R_{sat}/2$ from the in situ data location and acquired with a time-lag from the in situ measurement date that is less or equal than \pm 12 hours. If several satellite SSS samples are found to meet these criteria, the final satellite SSS match-up point is selected to be the closest in time from the in situ data measurement date. The final spatial and temporal lags between the in situ and satellite data are stored in the MDB files.

• For L3 and L4 composite SSS products :

If R_{sat} is the spatial resolution of the composite satellite SSS product and D the period over which the composite product was built (e.g., periods of 1, 7, 8, 9, 10, 18 days, 1 month, etc..) with central time t_o , for each in situ data sample collected in the Pi-MEP database during period D, the platform searches for all satellite SSS data of the composite product found at grid nodes located within a radius of $R_{sat}/2$ from the in situ data location. If several satellite SSS product samples are found to meet these criteria, the final satellite SSS match-up point is chosen to be the composite SSS with central time t_o which is the closest in time from the in situ data measurement date. The final spatial and temporal lags between the in situ and satellite data are stored in the MDB files.

2.4.3 MDB pair Co-localization with auxiliary data and complementary information

MDB data consist of satellite and $in\ situ$ SSS pairs but also of auxiliary geophysical parameters such as local and history of wind speed and rain rates, as well as various information (climatology, distance to coast, mixed layer depth, barrier layer thickness, etc) that can be derived from $in\ situ$ data and which are included in the final match-up files. The collocation of auxiliary parameters and additional information is done for each $in\ situ$ SSS measurement contained in the match-up files as follows:

If t_{insitu} is the time/date at which the in situ measurement is performed, we collect:

- The ASCAT wind speed product of the same day than t_{insitu} found at the ASCAT $1/4^{\circ}$ grid node with closest distance from the *in situ* data location and the time series of the ASCAT wind speed at the same node for the 10 days prior the *in situ* measurement day.
- If the *in situ* data is located within the 60°N-60°S band, we select the CMORPH 3-hourly product the closest in time from t_{insitu} and found at the CMORPH 1/4° grid node with closest distance from the *in situ* data location. We then store the time series of the CMORPH rain rate at the same node for the 10 days prior the *in situ* measurement time.

For the given month/year of the *in situ* data, we select the ISAS and WOA fields for the same month (and same year for ISAS fields) and take the SSS analysis (monthly mean, std) found at the closest grid node from the *in situ* measurement.



The distance from the *in situ* SSS data location to the nearest coast is evaluated and provided in km. We use a distance-to-coast map at $1/4^{\circ}$ resolution where small islands have been removed.

When vertical profiles of salinity (S) and temperature (T) are made available from the *in situ* measurements used to build the match-up (Argo or sea mammals), the following variables are included into each satellite/*in situ* match-up file:

- 1. The vertical distribution of pressure at which the profile were measured,
- 2. The vertical S(z) and T(z) profiles,
- 3. The vertical potential density anomaly profile $\sigma_0(z)$,
- 4. The Mixed Layer Depth (MLD). The MLD is defined here as the depth where the potential density has increased from the reference depth (10 meter) by a threshold equivalent to 0.2°C decrease in temperature at constant salinity: $\sigma_0 = \sigma_{010m} + \Delta \sigma_0$ with $\Delta \sigma_0 = \sigma_0(\theta_{10m} 0.2, S_{10m}) \sigma_0(\theta_{10m}, S_{10m})$ where θ_{10m} and S_{10m} are the temperature and salinity at the reference depth (i.e. 10 m) (de Boyer Montégut et al. (2004), de Boyer Montégut et al. (2007)).
- 5. The Top of the Thermocline Depth (TTD) is defined as the depth at which temperature decreases from its 10 m value by 0.2°C.
- 6. The Barrier Layer if present, is defined as the intermediate layer between the top of the thermocline and the bottom of the density mixed-layer and its thickness (BLT) is defined as the difference between the MLD and the TTD.
- 7. The vertical profile of the buoyancy frequency $N^2(z)$

The resulting match-ups files are serialized as NetCDF-4 files whose structure depends on the origin of the *in situ* data and is described in section 2.4.4.

2.4.4 Content of the Match-Up NetCDF files

```
netcdf pimep-mdb_smos-l2-v700_waveglider_20100116_v01 {
dimensions:
    TIME\_SAT = UNLIMITED; // (1 currently)
    TIME_WAVEGLIDER = 2190;
    N_DAYS_WIND = 10;
    N_3H_RAIN = 80;
    STRING25 = 25;
    STRING8 = 8;
  variables:
float DATE_WAVEGLIDER(TIME_WAVEGLIDER) ;
    DATE_WAVEGLIDER:long_name = "Date of WAVEGLIDER";
    DATE_WAVEGLIDER:units = "days since 1990-01-01 00:00:00";
    DATE_WAVEGLIDER:standard_name = "time";
    DATE_WAVEGLIDER:_FillValue = -999.f;
float LATITUDE_WAVEGLIDER(TIME_WAVEGLIDER) ;
    LATITUDE_WAVEGLIDER:long_name = "Latitude of WAVEGLIDER";
    LATITUDE_WAVEGLIDER:units = "degrees_north";
    LATITUDE_WAVEGLIDER:valid_min = -90.;
```



```
LATITUDE_WAVEGLIDER:valid_max = 90.;
    LATITUDE\_WAVEGLIDER: standard\_name = "latitude" \ ;
    LATITUDE_WAVEGLIDER:_FillValue = -999.f;
float LONGITUDE_WAVEGLIDER(TIME_WAVEGLIDER) ;
    LONGITUDE_WAVEGLIDER:long_name = "Longitude of WAVEGLIDER";
    LONGITUDE_WAVEGLIDER:units = "degrees_east";
    LONGITUDE_WAVEGLIDER:valid_min = -180.;
    LONGITUDE_WAVEGLIDER:valid_max = 180.;
    LONGITUDE\_WAVEGLIDER: standard\_name = "longitude" \ ;
    LONGITUDE_WAVEGLIDER:_FillValue = -999.f;
float SSS_WAVEGLIDER(TIME_WAVEGLIDER) ;
    SSS_WAVEGLIDER:long_name = "WAVEGLIDER SSS";
    SSS\_WAVEGLIDER:units = "1";
    SSS_WAVEGLIDER:salinity_scale = "Practical Salinity Scale(PSS-78)";
    SSS_WAVEGLIDER:standard_name = "sea_water_salinity";
    SSS_WAVEGLIDER:_FillValue = -999.f;
float SST_WAVEGLIDER(TIME_WAVEGLIDER) ;
    {\tt SST\_WAVEGLIDER:long\_name} = "WAVEGLIDER SST" \ ;
    SST_WAVEGLIDER:units = "degree Celsius";
    SST_WAVEGLIDER:standard_name = "sea_water_temperature";
    SST_WAVEGLIDER:_FillValue = -999.f;
float SSS_WAVEGLIDER_FILTERED(TIME_WAVEGLIDER);
    SSS_WAVEGLIDER_FILTERED:long_name = "WAVEGLIDER SSS median filtered at
satellite spatial resolution";
    SSS_WAVEGLIDER_FILTERED:units = "1";
    SSS_WAVEGLIDER_FILTERED:salinity_scale = "Practical Salinity Scale(PSS-78)";
    SSS_WAVEGLIDER_FILTERED:standard_name = "sea_water_salinity";
    SSS_WAVEGLIDER_FILTERED:_FillValue = -999.f;
float SST_WAVEGLIDER_FILTERED(TIME_WAVEGLIDER);
    SST_WAVEGLIDER_FILTERED:long_name = "WAVEGLIDER SST median filtered at
satellite spatial resolution";
    SST_WAVEGLIDER_FILTERED:units = "degree Celsius";
    SST_WAVEGLIDER_FILTERED:standard_name = "sea_water_temperature";
    SST_WAVEGLIDER_FILTERED:_FillValue = -999.f;
float DISTANCE_TO_COAST_WAVEGLIDER(TIME_WAVEGLIDER) ;
    DISTANCE_TO_COAST_WAVEGLIDER:long_name = "Distance to coasts at WAVEG-
    DISTANCE_TO_COAST_WAVEGLIDER:units = "km";
    DISTANCE_TO_COAST_WAVEGLIDER:_FillValue = -999.f;
{\it float\ PLATFORM\_NUMBER\_WAVEGLIDER}(TIME\_WAVEGLIDER)\ ;
    PLATFORM_NUMBER_WAVEGLIDER:long_name = "WAVEGLIDER unique identifier"
    PLATFORM_NUMBER_WAVEGLIDER:conventions = "WMO float identifier: A9IIIII";
    PLATFORM_NUMBER_WAVEGLIDER:units = "1";
    PLATFORM_NUMBER_WAVEGLIDER:_FillValue = -999.f;
float DATE_Satellite_product(TIME_Sat) ;
    DATE_Satellite_product:long_name = "Central time of satellite SSS file";
    DATE_Satellite_product:units = "days since 1990-01-01 00:00:00";
    DATE_Satellite_product:standard_name = "time";
```



```
float LATITUDE_Satellite_product(TIME_WAVEGLIDER);
    LATITUDE_Satellite_product:long_name = "Satellite product latitude at WAVEGLIDER
location";
    LATITUDE_Satellite_product:units = "degrees_north";
    LATITUDE_Satellite_product:valid_min = -90.;
    LATITUDE_Satellite_product:valid_max = 90.;
    LATITUDE\_Satellite\_product:standard\_name = "latitude":
    LATITUDE_Satellite_product:_FillValue = -999.f;
float LONGITUDE_Satellite_product(TIME_WAVEGLIDER);
    LONGITUDE_Satellite_product:long_name = "Satellite product longitude at WAVEGLIDER
    LONGITUDE_Satellite_product:units = "degrees_east";
    LONGITUDE_Satellite_product:valid_min = -180.;
    LONGITUDE_Satellite_product:valid_max = 180.;
    LONGITUDE_Satellite_product:standard_name = "longitude";
    LONGITUDE_Satellite_product:_FillValue = -999.f;
float SSS_Satellite_product(TIME_WAVEGLIDER) ;
    SSS\_Satellite\_product:long\_name = "Satellite\_product SSS \ at \ WAVEGLIDER \ location" \ ;
    SSS\_Satellite\_product:units = "1";
    SSS_Satellite_product:salinity_scale = "Practical Salinity Scale(PSS-78)";
    SSS_Satellite_product:standard_name = "sea_surface_salinity";
    SSS\_Satellite\_product:\_FillValue = -999.f;
float SST_Satellite_product(TIME_WAVEGLIDER) ;
    SST_Satellite_product:long_name = "Satellite product SST at WAVEGLIDER location";
    SST_Satellite_product:units = "degree Celsius";
    SST_Satellite_product:standard_name = "sea_surface_temperature";
    SST\_Satellite\_product:\_FillValue = -999.f;
float Spatial_lags(TIME_WAVEGLIDER);
    Spatial_lags:long_name = "Spatial lag between WAVEGLIDER location and satellite SSS
product pixel center":
    Spatial_lags:units = "km";
    Spatial_lags:_FillValue = -999.f;
float Time_lags(TIME_WAVEGLIDER);
     Time_lags:long_name = "Temporal lag between WAVEGLIDER time and satellite SSS
product central time";
    Time\_lags:units = "days";
    Time_lags:_FillValue = -999.f;
float ROSSBY_RADIUS_at_WAVEGLIDER(TIME_WAVEGLIDER);
    ROSSBY_RADIUS_at_WAVEGLIDER:long_name = "Baroclinic Rossby radius of deforma-
tion (Chelton et al., 1998) at WAVEGLIDER location";
    ROSSBY_RADIUS_at_WAVEGLIDER:units = "km";
    ROSSBY_RADIUS_at_WAVEGLIDER:_FillValue = -999.f;
float Ascat_daily_wind_at_WAVEGLIDER(TIME_WAVEGLIDER);
     Ascat_daily_wind_at_WAVEGLIDER:long_name = "Daily Ascat wind speed module at
WAVEGLIDER location";
    Ascat_daily\_wind\_at\_WAVEGLIDER:units = "m/s";
    Ascat_daily_wind_at_WAVEGLIDER:_FillValue = -999.f;
float CMORPH_3h_Rain_Rate_at_WAVEGLIDER(TIME_WAVEGLIDER);
     CMORPH_3h_Rain_Rate_at_WAVEGLIDER:long_name = "3-hourly CMORPH rain rate
```



```
at WAVEGLIDER location";
    CMORPH_3h_Rain_Rate_at_WAVEGLIDER:units = "mm/3h";
    CMORPH_3h_Rain_Rate_at_WAVEGLIDER:_FillValue = -999.f;
float Ascat_10_prior_days_wind_at_WAVEGLIDER(TIME_WAVEGLIDER, N_DAYS_WIND);
    Ascat_10_prior_days_wind_at_WAVEGLIDER:long_name = "Prior 10 days time series of As-
cat wind speed module at WAVEGLIDER location";
    Ascat_10_prior_days_wind_at_WAVEGLIDER:units = "m/s";
    Ascat_10_prior_days_wind_at_WAVEGLIDER:_FillValue = -999.f;
float CMORPH_10_prior_days_Rain_Rate_at_WAVEGLIDER(TIME_WAVEGLIDER, N_3H_RAIN)
    CMORPH_10_prior_days_Rain_Rate_at_WAVEGLIDER:long_name = "Prior 10 days times
series of 3-hourly CMORPH Rain Rate at WAVEGLIDER location";
    CMORPH_10_prior_days_Rain_Rate_at_WAVEGLIDER:units = "mm/3h";
    CMORPH_10_prior_days_Rain_Rate_at_WAVEGLIDER:_FillValue = -999.f;
float SSS_ISAS_at_WAVEGLIDER(TIME_WAVEGLIDER) ;
    SSS_ISAS_at_WAVEGLIDER:long_name = "ISAS SSS (5m depth) at WAVEGLIDER lo-
cation";
    SSS_ISAS_at_WAVEGLIDER:units = "1";
    SSS_ISAS_at_WAVEGLIDER:salinity_scale = "Practical Salinity Scale(PSS-78)";
    SSS_ISAS_at_WAVEGLIDER:standard_name = "sea_water_salinity";
    SSS_ISAS_at_WAVEGLIDER:_FillValue = -999.f;
float SSS_PCTVAR_ISAS_at_WAVEGLIDER(TIME_WAVEGLIDER);
    SSS\_PCTVAR\_ISAS\_at\_WAVEGLIDER:long\_name = "Error on ISAS SSS (5m depth) at
WAVEGLIDER location (% variance)";
    SSS_PCTVAR_ISAS_at_WAVEGLIDER:units = "%";
    SSS_PCTVAR_ISAS_at_WAVEGLIDER:_FillValue = -999.f;
float SSS_WOA13_at_WAVEGLIDER(TIME_WAVEGLIDER);
    SSS_WOA13_at_WAVEGLIDER:long_name = "WOA 2013 (DECAV-1deg) SSS (0m depth)
at WAVEGLIDER location";
    SSS_WOA13_at_WAVEGLIDER:units = "1";
    SSS_WOA13_at_WAVEGLIDER:salinity_scale = "Practical Salinity Scale(PSS-78)";
    SSS_WOA13_at_WAVEGLIDER:standard_name = "sea_surface_salinity";
    SSS\_WOA13\_at\_WAVEGLIDER:\_FillValue = -999.f;
float SSS_STD_WOA13_at_WAVEGLIDER(TIME_WAVEGLIDER);
    SSS_STD_WOA13_at_WAVEGLIDER:long_name = "WOA 2013 (DECAV-1deg) SSS STD
(0m depth) at WAVEGLIDER location";
    SSS_STD_WOA13_at_WAVEGLIDER:units = "1";
    SSS\_STD\_WOA13\_at\_WAVEGLIDER:\_FillValue = -999.f;
float SSS_ISAS15_at_WAVEGLIDER(N_prof);
    SSS_ISAS15_at_WAVEGLIDER:long_name = "Monthly ISAS-15 SSS (5m depth) at WAVEG-
LIDER location";
    SSS_ISAS15_at_WAVEGLIDER:units = "1";
    SSS_ISAS15_at_WAVEGLIDER:salinity_scale = "Practical Salinity Scale (PSS-78)";
    SSS_ISAS15_at_WAVEGLIDER:standard_name = "sea_water_salinity";
    SSS_ISAS15_at_WAVEGLIDER:_FillValue = -999.f;
float SSS_PCTVAR_ISAS15_at_WAVEGLIDER(N_prof);
    SSS_PCTVAR_ISAS15_at_WAVEGLIDER:long_name = "Error on monthly ISAS-15 SSS
(5m depth) at WAVEGLIDER location (% variance)";
    SSS_PCTVAR_ISAS15_at_WAVEGLIDER:units = "%";
```



```
SSS_PCTVAR_ISAS15_at_WAVEGLIDER:_FillValue = -999.f;
float SSS_WOA18_at_WAVEGLIDER(N_prof);
       SSS_WOA18_at_WAVEGLIDER:long_name = "Monthly WOA 2018 (DECAV-1deg) SSS
(0m depth) at WAVEGLIDER location";
       SSS_WOA18_at_WAVEGLIDER:units = "1";
       SSS_WOA18_at_WAVEGLIDER:salinity_scale = "Practical Salinity Scale (PSS-78)";
       SSS_WOA18_at_WAVEGLIDER:standard_name = "sea_surface_salinity";
       SSS_WOA18_at_WAVEGLIDER:_FillValue = -999.f;
float SSS_STD_WOA18_at_WAVEGLIDER(N_prof);
        SSS_STD_WOA18_at_WAVEGLIDER:long_name = "Monthly WOA 2018 (DECAV-1deg)
SSS STD (0m depth) at WAVEGLIDER location " ;
       SSS_STD_WOA18_at_WAVEGLIDER:units = "1";
       SSS\_STD\_WOA18\_at\_WAVEGLIDER:\_FillValue = -999.f;
float SEA_ICE_CONCENTRATION_at_WAVEGLIDER(N_prof);
       SEA_ICE_CONCENTRATION_at_WAVEGLIDER:long_name = "Daily sea ice area frac-
tion (EUMETSAT OSI-SAF OSI-450) at WAVEGLIDER location (%)";
       SEA_ICE_CONCENTRATION_at_WAVEGLIDER:units = "1";
       SEA_ICE_CONCENTRATION_at_WAVEGLIDER:standard_name = "sea_ice_area_fraction"
       SEA_ICE_CONCENTRATION_at_WAVEGLIDER:_FillValue = -999.f;
float CCMP_6h_Wind_Speed_at_WAVEGLIDER(N_prof);
        CCMP_6h_Wind_Speed_at_WAVEGLIDER:long_name = "6-hourly CCMP wind speed at
WAVEGLIDER location";
       CCMP_6h_Wind_Speed_at_WAVEGLIDER:units = "m s-1";
       CCMP_6h_Wind_Speed_at_WAVEGLIDER:standard_name = "wind_speed";
       CCMP_6h_Wind_Speed_at_WAVEGLIDER:_FillValue = -999.f;
float CCMP_10_prior_days_Wind_Speed_at_WAVEGLIDER(N_prof, N_DAYS_WIND_CCMP);
       CCMP_10_prior_days_Wind_Speed_at_WAVEGLIDER:long_name = "Prior 10 days time se-
ries of CCMP wind speed at WAVEGLIDER location";
       CCMP_10_prior_days_Wind_Speed_at_WAVEGLIDER:units = "m s-1";
       \label{local_condition} \begin{split} & CCMP\_10\_prior\_days\_Wind\_Speed\_at\_WAVEGLIDER: standard\_name = "wind\_speed" \ ; \end{split}
       CCMP_10_prior_days_Wind_Speed_at_WAVEGLIDER:_FillValue = -999.f;
float CDM_GLOBCOLOUR_at_WAVEGLIDER(N_prof);
       CDM_GLOBCOLOUR_at_WAVEGLIDER:long_name = "8-day Coloured dissolved and de-
trital organic materials - mean of the binned pixels at WAVEGLIDER location";
       CDM_GLOBCOLOUR_at_WAVEGLIDER:units = "m-1";
       CDM\_GLOBCOLOUR\_at\_WAVEGLIDER:\_FillValue = -999.f \; ;
float CHL1_GLOBCOLOUR_at_WAVEGLIDER(N_prof);
       CHL1_GLOBCOLOUR_at_WAVEGLIDER:long_name = "8-day Chlorophyll concentration
- mean of the binned pixels at WAVEGLIDER location";
       CHL1_GLOBCOLOUR_at_WAVEGLIDER:units = "mg m-3";
       CHL1\_GLOBCOLOUR\_at\_WAVEGLIDER: standard\_name = "mass\_concentration\_of\_chlorophyll\_a\_in\_sea\_water" and the property of the pr
       CHL1\_GLOBCOLOUR\_at\_WAVEGLIDER:\_FillValue = -999.f;
{\it float EVAPORATION\_OAFLUX\_at\_WAVEGLIDER(N\_prof)}~;
       EVAPORATION_OAFLUX_at_WAVEGLIDER:long_name = "Daily mean evaporation rate
```

(OAFlux) at WAVEGLIDER location";



```
EVAPORATION_OAFLUX_at_WAVEGLIDER:units = "cm year-1";
           EVAPORATION_OAFLUX_at_WAVEGLIDER:_FillValue = -999.f;
float SSS_SCRIPPS_at_WAVEGLIDER(N_prof);
           SSS\_SCRIPPS\_at\_WAVEGLIDER:long\_name = "Argo gridded monthly mean SSS (0m) \\
depth) from SCRIPPS (Roemmich-Gilson) at WAVEGLIDER location";
           SSS_SCRIPPS_at_WAVEGLIDER:units = "1";
           SSS_SCRIPPS_at_WAVEGLIDER:salinity_scale = "Practical Salinity Scale (PSS-78)";
           SSS_SCRIPPS_at_WAVEGLIDER:standard_name = "sea_water_salinity";
           SSS_SCRIPPS_at_WAVEGLIDER:_FillValue = -999.f;
float SSS_IPRC_at_WAVEGLIDER(N_prof);
           SSS_IPRC_at_WAVEGLIDER:long_name = "Argo gridded monthly mean SSS (0m depth)
from IPRC at WAVEGLIDER location";
           SSS_IPRC_at_WAVEGLIDER:units = "1";
           SSS_IPRC_at_WAVEGLIDER:salinity_scale = "Practical Salinity Scale (PSS-78)";
           SSS_IPRC_at_WAVEGLIDER:standard_name = "sea_water_salinity";
           SSS_IPRC_at_WAVEGLIDER:_FillValue = -999.f;
float SST_AVHRR_at_WAVEGLIDER(N_prof);
           SST_AVHRR_at_WAVEGLIDER:long_name = "Daily OI AVHRR-only v2 SST (Reynolds
et al., 2007) at WAVEGLIDER location";
          SST_AVHRR_at_WAVEGLIDER:units = "degree Celsius";
           SST_AVHRR_at_WAVEGLIDER:standard_name = "sea_water_temperature";
           SST_AVHRR_at_WAVEGLIDER:_FillValue = -999.f;
float U_EKMAN_GLOBCURRENT_at_WAVEGLIDER(N_prof);
           U_EKMAN_GLOBCURRENT_at_WAVEGLIDER:long_name = "15m depth Ekman cur-
rent velocity: zonal component at WAVEGLIDER location";
           U_EKMAN_GLOBCURRENT_at_WAVEGLIDER:units = "m s-1";
           U_EKMAN_GLOBCURRENT_at_WAVEGLIDER:_FillValue = -999.f;
float V_EKMAN_GLOBCURRENT_at_WAVEGLIDER(N_prof);
           V_EKMAN_GLOBCURRENT_at_WAVEGLIDER:long_name = "15m depth Ekman cur-
rent velocity: meridian component at WAVEGLIDER location";
           V_EKMAN_GLOBCURRENT_at_WAVEGLIDER:units = "m s-1";
           V_EKMAN_GLOBCURRENT_at_WAVEGLIDER:_FillValue = -999.f;
float U_GEOSTROPHIC_GLOBCURRENT_at_WAVEGLIDER(N_prof);
           U\_GEOSTROPHIC\_GLOBCURRENT\_at\_WAVEGLIDER: long\_name = "Absolute geostrophic long_name" = "Absolute geostrophic long_nam
velocity: zonal component at WAVEGLIDER location";
           U_GEOSTROPHIC_GLOBCURRENT_at_WAVEGLIDER:units = "m s-1";
           U_GEOSTROPHIC_GLOBCURRENT_at_WAVEGLIDER:_FillValue = -999.f;
float V_GEOSTROPHIC_GLOBCURRENT_at_WAVEGLIDER(N_prof);
          V\_GEOSTROPHIC\_GLOBCURRENT\_at\_WAVEGLIDER:long\_name = "Absolute geostrophic long_name" = "Absolute geostrophic long_name"
velocity: meridian component at WAVEGLIDER location";
           V_GEOSTROPHIC_GLOBCURRENT_at_WAVEGLIDER:units = "m s-1";
           V_GEOSTROPHIC_GLOBCURRENT_at_WAVEGLIDER:_FillValue = -999.f;
       // global attributes:
           :Conventions = "CF-1.6";
           :title = "Waveglider Match-Up Database";
           :Satellite_product_name = "SMOS SSS L2 v700 (ESA)";
           :Satellite_product_spatial_resolution = "30 km";
           :Satellite_product_temporal_resolution = "50 min";
```



```
:Satellite_product_filename = "netcdf/2011/01/10/SM_REPR_MIR_OSUDP2_20110110T175205_20110110T184523_700_100_1.n.c"
     :Match-Up_spatial_window_radius_in_km = 25;
     :Match-Up\_temporal\_window\_radius\_in\_days = 0.5;
     :start\_time = "20100114T000005Z";
     :stop\_time = "20100118T235026Z";
     :northernmost_latitude = 77.676f:
     :sourthenmost_latitude = -66.423f;
     :westernmost_longitude = -179.219f;
     :easternmost_longitude = 179.199f;
     :geospatial_lat_units = "degrees north";
     :geospatial_lat_resolution = "30 km";
     :geospatial_lon_units = "degrees east";
     :geospatial_lon_resolution = "30 km";
     :institution = "ESA-IFREMER-ODL-OCEANSCOPE";
     :project_name = "SMOS Pilot-Mission Exploitation Platform (Pi-MEP) for salinity";
     :project_url = "https://www.salinity-pimep.org";
     :license = "Pi-MEP data use is free and open";
     :product_version = "1.0";
     :keywords = "Oceans > Ocean Salinity > Sea Surface Salinity";
     :acknowledgment = "Please acknowledge the use of these data with the following state-
ment: These data were provided by the SMOS Pilot-Mission Exploitation Platform (Pi-MEP)
for salinity";
     :Source = "netcdf/2011/01/10/SM_REPR_MIR_OSUDP2_20110110T175205_20110110T184523_700_100_1.nc";
     :references = "https://www.salinity-pimep.org";
     :history = "Processed on 2018-04-18 using MDB_generator";
     : date\_created = "2018-04-18\ 17:09:30";
}
```

2.5 MDB characteristics for the particular in situ/satellite pairs

2.5.1 Number of paired SSS data as a function of time and distance to coast

Figure 1 shows the time (a) and distance to coast (b) distributions of the match-ups between Waveglider and SMOS SSS L2 v700 (ESA) for the SPURS 2 Pi-MEP region and for the full satellite product period.



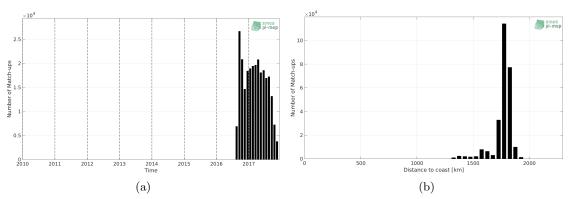


Figure 1: Number of match-ups between Waveglider and SMOS SSS L2 v700 (ESA) SSS as a function of time (a) and as function of the distance to coast (b) over the SPURS 2 Pi-MEP region and for the full satellite product period.

2.5.2 Histograms of the SSS match-ups

Figure 2 shows the SSS distribution of Waveglider (a) and SMOS SSS L2 v700 (ESA) (b) considering all match-up pairs per bins of 0.1 over the SPURS 2 Pi-MEP region and for the full satellite product period.

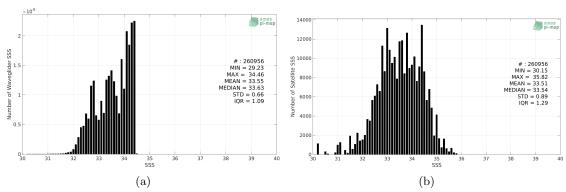


Figure 2: Histograms of SSS from Waveglider (a) and SMOS SSS L2 v700 (ESA) (b) considering all match-up pairs per bins of 0.1 over the SPURS 2 Pi-MEP region and for the full satellite product period.

2.5.3 Spatial Distribution of Match-ups

The number of SSS match-ups between Waveglider SSS and the SMOS SSS L2 v700 (ESA) SSS product for the SPURS 2 Pi-MEP region over 1°x1° boxes and for the full satellite product period is shown in Figure 3.



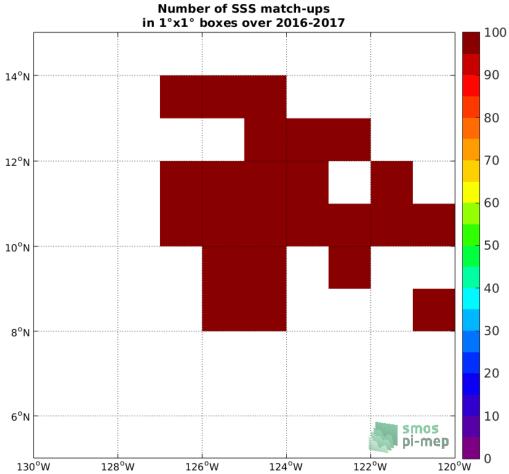


Figure 3: Number of SSS match-ups between Waveglider SSS and the SMOS SSS L2 v700 (ESA) SSS product for the SPURS 2 Pi-MEP region over $1^{\circ}x1^{\circ}$ boxes and for the full satellite product period.

2.5.4 Histograms of the spatial and temporal lags of the match-ups pairs

Figure 4 reveals the spatial (left) and temporal (right) lags between the location/time of the Waveglider measurement and the position/date of the corresponding SMOS SSS L2 v700 (ESA) SSS pixel of all match-ups pairs.



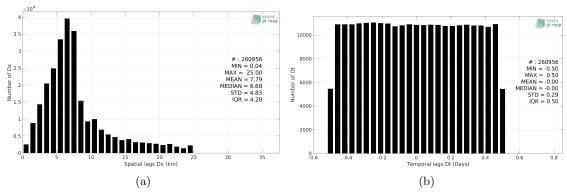


Figure 4: Histograms of the spatial (a) and temporal (b) lags between the location/time of the Waveglider measurement and the date of the corresponding SMOS SSS L2 v700 (ESA) SSS pixel.

3 MDB file Analyses

3.1 Spatial Maps of the Temporal mean and Std of in situ and satellite SSS and of the difference (Δ SSS)

In Figure 5, we show maps of temporal mean (left) and standard deviation (right) of the SMOS SSS L2 v700 (ESA) (top) and of the Waveglider in situ dataset at the collected Pi-MEP matchup pairs. The temporal mean and std are gridded over the full satellite product period and over spatial boxes of size 1° x 1° .

At the bottom of Figure 5, the temporal mean (left) and standard deviation (right) of the differences between the satellite SSS product and in situ data found at match-up pairs, namely Δ SSS(Satellite-Waveglider), is also gridded over the full satellite product period and over spatial boxes of size 1° x 1° .



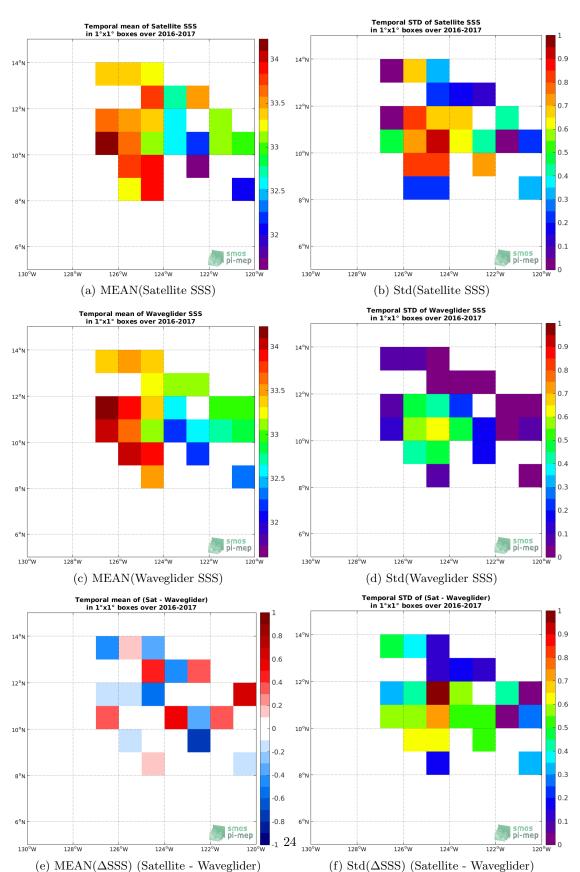


Figure 5: Temporal mean (left) and Std (right) of SSS from SMOS SSS L2 v700 (ESA) (top), Waveglider (middle), and of Δ SSS (Satellite - Waveglider). Only match-up pairs are used to generate these maps.



3.2 Time series of the monthly median and Std of in situ and satellite SSS and of the difference (Δ SSS)

In the top panel of Figure 6, we show the time series of the monthly median SSS estimated over the full SPURS 2 Pi-MEP region for both SMOS SSS L2 v700 (ESA) satellite SSS product (in black) and the Waveglider *in situ* dataset (in blue) at the collected Pi-MEP match-up pairs.

In the middle panel of Figure 6, we show the time series of the monthly median of Δ SSS (Satellite - Waveglider) for the collected Pi-MEP match-up pairs and estimated over the full SPURS 2 Pi-MEP region.

In the bottom panel of Figure 6, we show the time series of the monthly standard deviation of Δ SSS (Satellite - Waveglider) for the collected Pi-MEP match-up pairs and estimated over the full SPURS 2 Pi-MEP region.

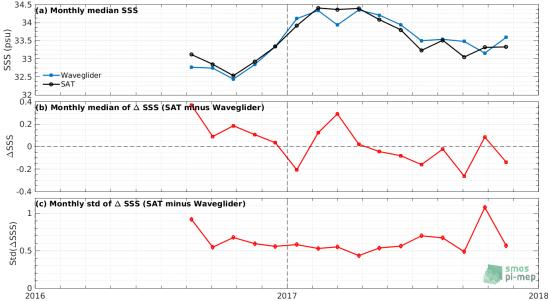


Figure 6: Time series of the monthly median SSS (top), median of Δ SSS (Satellite - Waveglider) and Std of Δ SSS (Satellite - Waveglider) over the SPURS 2 Pi-MEP region considering all match-ups collected by the Pi-MEP.

3.3 Zonal mean and Std of in situ and satellite SSS and of the difference (Δ SSS)

In Figure 7 left panel, we show the zonal mean SSS considering all Pi-MEP match-up pairs for both SMOS SSS L2 v700 (ESA) satellite SSS product (in black) and the Waveglider *in situ* dataset (in blue). The full satellite SSS product period is used to derive the mean.

In the right panel of Figure 7, we show the zonal mean of Δ SSS (Satellite - Waveglider) for all the collected Pi-MEP match-up pairs estimated over the full satellite product period.



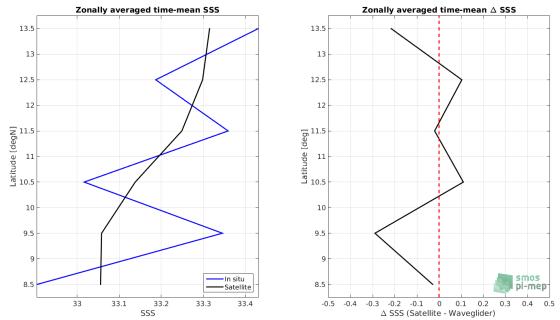


Figure 7: Left panel: Zonal mean SSS from SMOS SSS L2 v700 (ESA) satellite product (black) and from Waveglider (blue). Right panel: Zonal mean of Δ SSS (Satellite - Waveglider) for all the collected Pi-MEP match-up pairs estimated over the full satellite product period.

3.4 Scatterplots of satellite vs in situ SSS by latitudinal bands

In Figure 8, contour maps of the concentration of SMOS SSS L2 v700 (ESA) SSS (y-axis) versus Waveglider SSS (x-axis) at match-up pairs for different latitude bands: (a) 80°S-80°N, (b) 20°S-20°N, (c) 40°S-20°S and 20°N-40°N and (d) 60°S-40°S and 40°N-60°N. For each plot, the red line shows x=y. The black thin and dashed lines indicate a linear fit through the data cloud and the $\pm 95\%$ confidence levels, respectively. The number match-up pairs n, the slope and R^2 coefficient of the linear fit, the root mean square (RMS) and the mean bias between satellite and $in\ situ$ data are indicated for each latitude band in each plots.



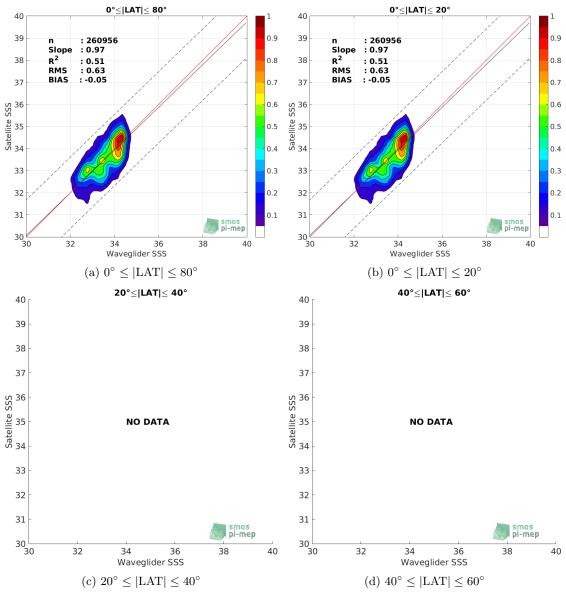


Figure 8: Contour maps of the concentration of SMOS SSS L2 v700 (ESA) SSS (y-axis) versus Waveglider SSS (x-axis) at match-up pairs for different latitude bands. For each plot, the red line shows x=y. The black thin and dashed lines indicate a linear fit through the data cloud and the $\pm 95\%$ confidence levels, respectively. The number match-up pairs n, the slope and R^2 coefficient of the linear fit, the root mean square (RMS) and the mean bias between satellite and in situ data are indicated for each latitude band in each plots.

3.5 Time series of the monthly median and Std of Δ SSS sorted by latitudinal bands

In Figure 9, time series of the monthly median (red curves) of ΔSSS (Satellite - Waveglider) and ± 1 Std (black vertical thick bars) as function of time for all the collected Pi-MEP match-up



pairs estimated over the SPURS 2 Pi-MEP region and for the full satellite product period are shown for different latitude bands: (a) $80^{\circ}\text{S}-80^{\circ}\text{N}$, (b) $20^{\circ}\text{S}-20^{\circ}\text{N}$, (c) $40^{\circ}\text{S}-20^{\circ}\text{S}$ and $20^{\circ}\text{N}-40^{\circ}\text{N}$ and (d) $60^{\circ}\text{S}-40^{\circ}\text{S}$ and $40^{\circ}\text{N}-60^{\circ}\text{N}$.

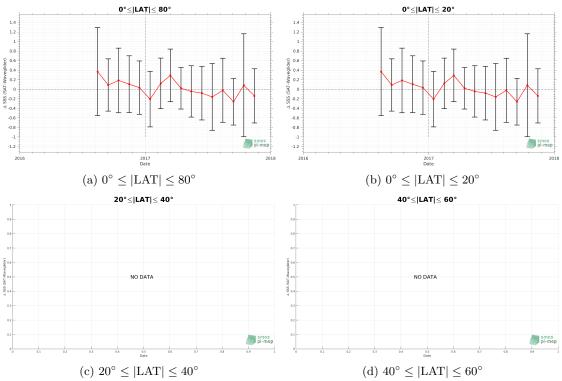


Figure 9: Monthly median (red curves) of ΔSSS (Satellite - Waveglider) and ± 1 Std (black vertical thick bars) as function of time for all the collected Pi-MEP match-up pairs estimated over the SPURS 2 Pi-MEP region and for the full satellite product period are shown for different latitude bands: (a) 80°S-80°N, (b) 20°S-20°N, (c) 40°S-20°S and 20°N-40°N and (d) 60°S-40°S and 40°N-60°N.

3.6 Δ SSS sorted as function of geophysical parameters

In Figure 10, we classify the match-up differences ΔSSS (Satellite - $in\ situ$) between SMOS SSS L2 v700 (ESA) and Waveglider SSS as function of the geophysical conditions at match-up points. The median and std of ΔSSS (Satellite - Waveglider) is thus evaluated as function of the

- in situ SSS values per bins of width 0.2,
- $\bullet \ \ in \ situ$ SST values per bins of width 1°C,
- $\bullet\,$ ASCAT daily wind values per bins of width 1 m/s,
- CMORPH 3-hourly rain rates per bins of width 1 mm/h, and,
- \bullet distance to coasts per bins of width 50 km.
- in situ measurement depth (if relevant).



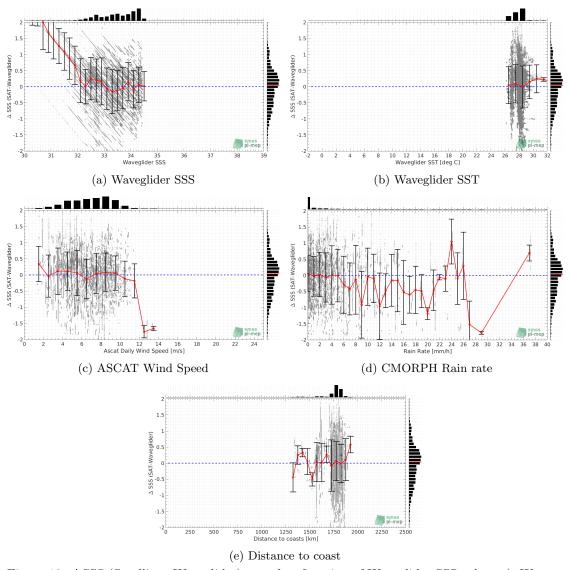


Figure 10: Δ SSS (Satellite - Waveglider) sorted as function of Waveglider SSS values a), Waveglider SST b), ASCAT Wind speed c), CMORPH rain rate d) and distance to coast (e). In all plots the median and Std of Δ SSS for each bin is indicated by the red curves and black vertical thick bars (± 1 Std)

3.7 Δ SSS maps and statistics for different geophysical conditions

In Figures 11 and 12, we focus on sub-datasets of the match-up differences Δ SSS (Satellite - in situ) between SMOS SSS L2 v700 (ESA) and Waveglider for the following specific geophysical conditions:

- C1:if the local value at *in situ* location of estimated rain rate is zero, mean daily wind is in the range [3, 12] m/s, the SST is > 5°C and distance to coast is > 800 km.
- C2: if the local value at in situ location of estimated rain rate is zero, mean daily wind is



in the range [3, 12] m/s.

- C3:if the local value at in situ location of estimated rain rate is high (ie. > 1 mm/h) and mean daily wind is low (ie. < 4 m/s).
- C5:if the *in situ* data is located where the climatological SSS standard deviation is low (ie. above < 0.2).
- C6:if the *in situ* data is located where the climatological SSS standard deviation is high (ie. above > 0.2).

For each of these conditions, the temporal mean (gridded over spatial boxes of size $1^{\circ}x1^{\circ}$) and the histogram of the difference ΔSSS (Satellite - in situ) are presented.

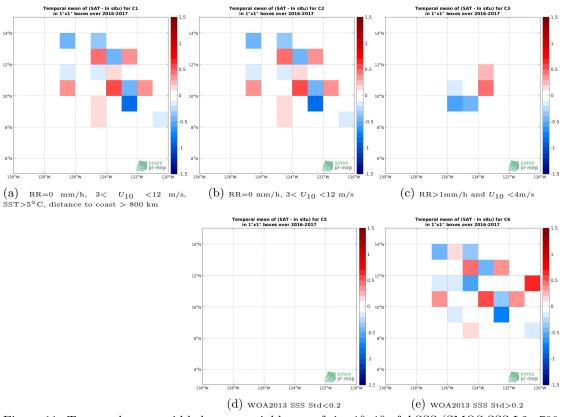


Figure 11: Temporal mean gridded over spatial boxes of size 1°x1° of ΔSSS (SMOS SSS L2 v700 (ESA) - Waveglider) for 5 different subdatasets corresponding to:RR=0 mm/h, $3 < U_{10} <$ 12 m/s, SST>5°C, distance to coast > 800 km (a), RR=0 mm/h, $3 < U_{10} <$ 12 m/s (b), RR>1mm/h and $U_{10} <$ 4m/s (c), WOA2013 SSS Std<0.2 (d), WOA2013 SSS Std>0.2 (e).



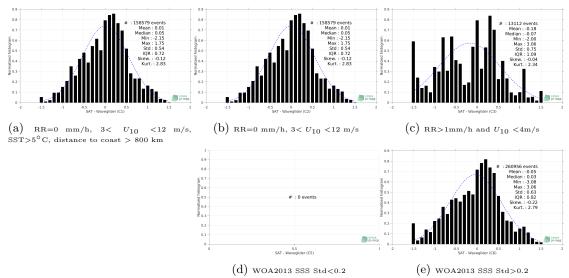


Figure 12: Normalized histogram of Δ SSS (SMOS SSS L2 v700 (ESA) - Waveglider) for 5 different subdatasets corresponding to: RR=0 mm/h, 3< U_{10} <12 m/s, SST>5°C, distance to coast > 800 km (a), RR=0 mm/h, 3< U_{10} <12 m/s (b), RR>1mm/h and U_{10} <4m/s (c), WOA2013 SSS Std<0.2 (d), WOA2013 SSS Std>0.2 (e).

4 Summary

- ▶ Table 1 shows the mean, median, standard deviation (Std), root mean square (RMS), interquartile range (IQR), correlation coefficient (r^2) and robust standard deviation (Std*) of the match-up differences Δ SSS (Satellite $in\ situ$) between SMOS SSS L2 v700 (ESA) and Waveglider derived over the SPURS 2 Pi-MEP region and for the full satellite product period and for the following conditions:
 - all: All the match-up pairs satellite/in situ SSS values are used to derive the statistics
 - C1: only pairs where RR=0 mm/h, $3 < U_{10} < 12$ m/s, SST>5°C, distance to coast > 800 km
 - C2: only pairs where RR=0 mm/h, $3 < U_{10} < 12$ m/s
 - C3: only pairs where RR>1mm/h and U_{10} <4m/s
 - C5: only pairs where WOA2013 SSS Std<0.2
 - C6: only pairs at WOA2013 SSS Std>0.2
 - C7a: only pairs with a distance to coast < 150 km.
 - C7b: only pairs with a distance to coast in the range [150, 800] km.
 - C7c: only pairs with a distance to coast > 800 km.
 - C8a: only pairs where SST is < 5°C.
 - C8b: only pairs where SST is in the range [5, 15]°C.



- C8c: only pairs where SST is > 15°C.
- C9a: only pairs where SSS is < 33.
- C9b: only pairs where SSS is in the range [33, 37].
- C9c: only pairs where SSS is > 37.

Table 1: Statistics of Δ SSS (Satellite - Waveglider)

Condition	#	Median	Mean	Std	RMS	IQR	\mathbf{r}^2	\mathbf{Std}^{\star}
all	260956	0.03	-0.05	0.63	0.63	0.82	0.510	0.58
C1	158579	0.05	0.01	0.54	0.54	0.72	0.546	0.52
C2	158579	0.05	0.01	0.54	0.54	0.72	0.546	0.52
C3	13112	-0.07	-0.18	0.75	0.77	1.09	0.120	0.76
C5	0	NaN	NaN	NaN	NaN	NaN	NaN	NaN
C6	260956	0.03	-0.05	0.63	0.63	0.82	0.510	0.58
C7a	0	NaN	NaN	NaN	NaN	NaN	NaN	NaN
C7b	0	NaN	NaN	NaN	NaN	NaN	NaN	NaN
$\overline{\text{C7c}}$	260956	0.03	-0.05	0.63	0.63	0.82	0.510	0.58
C8a	0	NaN	NaN	NaN	NaN	NaN	NaN	NaN
C8b	0	NaN	NaN	NaN	NaN	NaN	NaN	NaN
C8c	260956	0.03	-0.05	0.63	0.63	0.82	0.510	0.58
C9a	61688	0.18	0.02	0.68	0.68	0.67	0.087	0.41
C9b	199268	-0.01	-0.07	0.61	0.61	0.82	0.359	0.60
C9c	0	NaN	NaN	NaN	NaN	NaN	NaN	NaN

 \blacktriangleright Table 2 presents statistics of ΔSSS (Satellite - ISAS) using only ISAS SSS values with PCTVAR<80%.

Table 2: Statistics of Δ SSS (Satellite - ISAS)

Condition	#	Median	Mean	Std	RMS	IQR	\mathbf{r}^2	\mathbf{Std}^{\star}
all	260956	0.07	-0.02	0.65	0.65	0.84	0.480	0.62
C1	158579	0.11	0.05	0.55	0.56	0.79	0.526	0.56
C2	158579	0.11	0.05	0.55	0.56	0.79	0.526	0.56
C3	13112	-0.13	-0.19	0.70	0.72	1.00	0.082	0.65
C5	0	NaN	NaN	NaN	NaN	NaN	NaN	NaN
C6	260956	0.07	-0.02	0.65	0.65	0.84	0.480	0.62
C7a	0	NaN	NaN	NaN	NaN	NaN	NaN	NaN
C7b	0	NaN	NaN	NaN	NaN	NaN	NaN	NaN
C7c	260956	0.07	-0.02	0.65	0.65	0.84	0.480	0.62
C8a	0	NaN	NaN	NaN	NaN	NaN	NaN	NaN
C8b	0	NaN	NaN	NaN	NaN	NaN	NaN	NaN
C8c	260956	0.07	-0.02	0.65	0.65	0.84	0.480	0.62
C9a	61688	0.08	-0.08	0.73	0.73	0.82	0.008	0.59
C9b	199268	0.06	0.00	0.62	0.62	0.86	0.336	0.64
C9c	0	NaN	NaN	NaN	NaN	NaN	NaN	NaN

▶ Numerical values can be downloaded as csv files for Table 1 and Table 2.



5 More Comparison/Validation Materials

5.1 Comparisons with other satellite products

▶ Table 1 shows the mean, median, standard deviation (Std), root mean square (RMS), interquartile range (IQR), correlation coefficient (r^2) and robust standard deviation (Std*) of the match-up differences Δ SSS (Satellite - Waveglider) between different satellite products and **Waveglider** derived over the SPURS 2 Pi-MEP region considering all match-up pairs satellite/in situ SSS values to derive the statistics:

Table 1: Statistics of ΔSSS (Satellite - Waveglider) - All

Satellite products	#	Median	Mean	Std	RMS	IQR	\mathbf{r}^2	\mathbf{Std}^{\star}
smos-l2-v700	260956	0.03	-0.05	0.63	0.63	0.82	0.510	0.58
smap-l2-rss-v4	361098	-0.03	-0.02	0.37	0.37	0.42	0.707	0.31
smap-l2-jpl-v5.0	402154	-0.02	-0.01	0.54	0.54	0.67	0.571	0.50
smos-l3-catds-cpdc-v321-l2q	119427	0.13	0.12	0.70	0.71	0.94	0.451	0.69
smos-l3-catds-cpdc-v317-10d-25km	248204	0.11	0.12	0.31	0.33	0.35	0.793	0.26
smos-l3-catds-cpdc-v317-1m-25km	249818	0.11	0.13	0.28	0.31	0.32	0.832	0.24
smos-l3-catds-locean-v5-9d	642340	0.03	0.03	0.29	0.29	0.34	0.816	0.25
smos-l3-catds-locean-v5-18d	642340	0.02	0.04	0.26	0.26	0.32	0.848	0.23
smos-l3-bec-v2-9d	267987	0.40	0.44	0.38	0.58	0.56	0.759	0.41
smos-l3-icdc-v3-1m	189270	0.05	0.06	0.28	0.29	0.35	0.591	0.26
smap-l3-rss-v4-8dr	642340	-0.07	-0.08	0.26	0.27	0.27	0.852	0.20
smap-l3-rss-v4-1m	642340	-0.08	-0.08	0.25	0.26	0.26	0.862	0.19
smap-l3-jpl-v5.0-8dr	642340	0.02	0.03	0.25	0.25	0.27	0.855	0.20
smap-l3-jpl-v5.0-1m	642340	0.01	0.03	0.24	0.24	0.26	0.865	0.19
cci-l4-esa-merged-oi-v3.2-7dr	249737	0.00	0.02	0.27	0.27	0.29	0.835	0.22
cci-l4-esa-merged-oi-v3.2-30dr	246340	0.02	0.04	0.27	0.28	0.28	0.838	0.21
smap-l4-iprc-oi-v1-7d	268967	0.10	0.12	0.26	0.28	0.24	0.859	0.18
smap-l4-iprc-oi-v1-1m	268967	0.10	0.12	0.26	0.29	0.29	0.848	0.22

[▶] Table 2 is similar to Table 1 but considering only match-up pairs where RR=0 mm/h, $3 < U_{10} < 12$ m/s, SST>5°C, distance to coast > 800 km.



Table 2: Statis	Table 2: Statistics of ΔSSS (Satellite - Waveglider) - C1									
Satellite products	#	Median	Mean	\mathbf{Std}	RMS	IQR	\mathbf{r}^2	\mathbf{Std}^{\star}		
smos-l2-v700	158579	0.05	0.01	0.54	0.54	0.72	0.546	0.52		
smap-l2-rss-v4	251737	-0.04	-0.03	0.35	0.35	0.40	0.726	0.30		
smap-l2-jpl-v5.0	240130	-0.02	-0.01	0.48	0.48	0.63	0.579	0.47		
smos-l3-catds-cpdc-v321-l2q	66520	0.14	0.19	0.59	0.62	0.89	0.480	0.66		
smos-l3-catds-cpdc-v317-10d-25km	135785	0.10	0.09	0.27	0.29	0.35	0.834	0.26		
smos-l3-catds-cpdc-v317-1m-25km	136214	0.10	0.12	0.23	0.26	0.31	0.874	0.23		
smos-l3-catds-locean-v5-9d	366182	0.02	0.01	0.25	0.25	0.31	0.851	0.23		
smos-l3-catds-locean-v5-18d	366182	0.00	0.01	0.22	0.22	0.29	0.878	0.21		
smos-l3-bec-v2-9d	148487	0.30	0.35	0.32	0.48	0.47	0.815	0.33		
smos-l3-icdc-v3-1m	83799	0.01	0.04	0.27	0.27	0.35	0.635	0.26		
smap-l3-rss-v4-8dr	366182	-0.07	-0.08	0.21	0.23	0.23	0.891	0.17		
smap-l3-rss-v4-1m	366182	-0.08	-0.08	0.20	0.22	0.23	0.896	0.17		
smap-l3-jpl-v5.0-8dr	366182	0.03	0.01	0.20	0.20	0.24	0.895	0.18		
smap-l3-jpl-v5.0-1m	366182	0.01	0.01	0.20	0.20	0.24	0.900	0.18		
cci-l4-esa-merged-oi-v3.2-7dr	136103	-0.02	-0.01	0.21	0.21	0.26	0.893	0.20		
cci-l4-esa-merged-oi-v3.2-30dr	133328	0.00	0.01	0.21	0.21	0.25	0.897	0.19		
smap-l4-iprc-oi-v1-7d	149366	0.10	0.11	0.19	0.22	0.21	0.916	0.15		
smap-l4-iprc-oi-v1-1m	149366	0.10	0.10	0.21	0.23	0.27	0.901	0.20		

Table 2: Statistics of ASSS (Satellite -

- ▶ Numerical values can be downloaded as csv files for Table 1 and Table 2.
- ► Figures using numerical values of Table 1 sorted by MEDIANS, MEANS, IQR, RMS, STD, R2 are also provided.
- ▶ Figures using numerical values of Table 2 sorted by MEDIANS, MEANS, IQR, RMS, STD, R2 are also provided.

Caution has to be made in the interpretation of the "ranking" between different satellite products in particular when looking at the dispersion parameters like the standard deviation (STD), or the interquartile range (IQR). Keep in mind that low spatial and/or temporal resolution satellite SSS products tend to have lower dispersions than products at higher resolutions. For example, a level 2 (swath) product of a specific sensor will always have more dispersion than level 3 or 4 products where spatial and temporal averaging tend to reduce the instrumental noise and potential small scale variability. In general, products at 1°x1° spatial resolution have lower dispersion than products at 0.25°x0.25°. Same result applies for monthly products compared to daily products.

5.2Statistics derived for the different in situ databases

▶ Table 1 shows the mean, median, standard deviation (Std), root mean square (RMS), interquartile range (IQR), correlation coefficient (r²) and robust standard deviation (Std*) of the match-up differences Δ SSS (Satellite - in situ) between SMOS SSS L2 v700 (ESA) and all the available in situ datasets derived over the SPURS 2 Pi-MEP region and for the full satellite product period and considering all match-up pairs satellite in situ SSS values to derive the statistics:



Table 1. Statistics of \(\Delta \text{DDD}\) (Satellite - th stat)								
in situ database	#	Median	Mean	\mathbf{Std}	RMS	IQR	\mathbf{r}^2	\mathbf{Std}^{\star}
argo	2265	-0.09	-0.10	0.63	0.64	0.79	0.382	0.59
tsg-gosud-research-vessel	645	-0.24	-0.15	0.64	0.66	0.93	0.003	0.65
tsg-gosud-sailing-ship	5143	0.12	0.26	0.70	0.75	0.80	0.232	0.52
tsg-samos	15738	-0.44	-0.49	0.71	0.86	0.94	0.205	0.72
drifter	45631	0.10	0.06	0.67	0.68	0.86	0.335	0.64
snake	1523878	0.15	0.14	0.64	0.65	0.90	0.171	0.67
saildrone	2483	0.11	0.19	0.63	0.66	0.67	0.305	0.53
waveglider	260956	0.03	-0.05	0.63	0.63	0.82	0.510	0.58
seaglider	29413	0.08	0.02	0.66	0.66	0.83	0.497	0.60

Table 1: Statistics of Δ SSS (Satellite - $in \ situ$)

▶ Table 2 is similar to Table 1 but considering only match-up pairs where RR=0 mm/h, $3 < U_{10} < 12$ m/s, SST>5°C, distance to coast > 800 km.

Table 2.	Statistics	of ASSS	(Satellite -	in	eitar)	١
Table ∡:	Statistics	$01 \Delta 555$	(Satemite -	$\imath n$	suu	1

Table 2. Statistics of 2555 (Satomice "" 500a)								
in situ database	#	Median	Mean	$\operatorname{\mathbf{Std}}$	RMS	IQR	\mathbf{r}^2	\mathbf{Std}^{\star}
argo	1339	-0.04	-0.02	0.58	0.58	0.76	0.375	0.56
tsg-gosud-research-vessel	645	-0.24	-0.15	0.64	0.66	0.93	0.003	0.65
tsg-gosud-sailing-ship	3859	0.07	0.14	0.57	0.58	0.62	0.315	0.44
tsg-samos	10995	-0.30	-0.32	0.62	0.70	0.88	0.368	0.62
drifter	24235	0.15	0.13	0.56	0.57	0.73	0.398	0.54
snake	663900	0.15	0.17	0.58	0.60	0.83	0.162	0.63
saildrone	1195	0.15	0.21	0.57	0.60	0.56	0.291	0.43
waveglider	158579	0.05	0.01	0.54	0.54	0.72	0.546	0.52
seaglider	14286	0.12	0.09	0.56	0.57	0.73	0.581	0.56

▶ Numerical values can be downloaded as csv files for Table 1 and Table 2.

References

Abderrahim Bentamy and Denis Croize Fillon. Gridded surface wind fields from Metop/ASCAT measurements. *Int. J. Remote Sens.*, 33(6):1729–1754, March 2012. ISSN 1366-5901. doi: 10.1080/01431161.2011.600348.

Abderrahim Bentamy, Semyon A. Grodsky, James A. Carton, Denis Croizé-Fillon, and Bertrand Chapron. Matching ASCAT and QuikSCAT winds. *J. Geophys. Res.*, 117(C2), February 2012. ISSN 0148-0227. doi: 10.1029/2011JC007479.

Jacqueline Boutin, Jean-Luc Vergely, Emmanuel P. Dinnat, Philippe Waldteufel, Francesco D'Amico, Nicolas Reul, Alexandre Supply, and Clovis Thouvenin-Masson. Correcting sea surface temperature spurious effects in salinity retrieved from spaceborne l-band radiometer measurements. *IEEE Trans. Geosci. Remote Sens.*, pages 1–14, 2020. doi: 10.1109/tgrs.2020. 3030488.

Jaqueline Boutin, Y. Chao, W. E. Asher, T. Delcroix, R. Drucker, K. Drushka, N. Kolodziejczyk, T. Lee, N. Reul, G. Reverdin, J. Schanze, A. Soloviev, L. Yu, J. Anderson, L. Brucker, E. Dinnat, A. S. Garcia, W. L. Jones, C. Maes, T. Meissner, W. Tang, N. Vinogradova,



- and B. Ward. Satellite and In Situ Salinity: Understanding Near-Surface Stratification and Sub-footprint Variability. *Bull. Am. Meterol. Soc.*, 97(8):1391–1407, 2016. ISSN 1520-0477. doi: 10.1175/bams-d-15-00032.1.
- Clément de Boyer Montégut, Gurvan Madec, A. S. Fischer, A. Lazar, and D. Ludicone. Mixed layer depth over the global ocean: An examination of profile data and a profile-based climatology. *J. Geophys. Res.*, 109(C12), December 2004. doi: 10.1029/2004jc002378.
- Clément de Boyer Montégut, Juliette Mignot, Alban Lazar, and Sophie Cravatte. Control of salinity on the mixed layer depth in the world ocean: 1. General description. *J. Geophys. Res.*, 112(C6), June 2007. ISSN 0148-0227. doi: 10.1029/2006jc003953.
- Ralph R. Ferraro. SSM/I derived global rainfall estimates for climatological applications. *J. Geophys. Res.*, 102(D14):16715–16736, 07 1997. doi: 10.1029/97JD01210.
- Ralph R. Ferraro, Fuzhong Weng, Norman C. Grody, and Limin Zhao. Precipitation characteristics over land from the NOAA-15 AMSU sensor. *Geophys. Res. Lett.*, 27(17):2669–2672, 2000. doi: 10.1029/2000GL011665.
- Fabienne Gaillard, Thierry Reynaud, Virginie Thierry, Nicolas Kolodziejczyk, and Karina von Schuckmann. In Situ-Based Reanalysis of the Global Ocean Temperature and Salinity with ISAS: Variability of the Heat Content and Steric Height. J. Clim., 29(4):1305–1323, February 2016. ISSN 1520-0442. doi: 10.1175/jcli-d-15-0028.1.
- Robert J. Joyce, John E. Janowiak, Phillip A. Arkin, and Pingping Xie. CMORPH: A Method that Produces Global Precipitation Estimates from Passive Microwave and Infrared Data at High Spatial and Temporal Resolution. *J. Hydrometeorol.*, 5(3):487–503, June 2004. doi: 10.1175/1525-7541(2004)005\(0487: \cappa \) camtpg\(2.0.\co; 2. \)
- Nicolas Kolodziejczyk, Gilles Reverdin, and Alban Lazar. Interannual Variability of the Mixed Layer Winter Convection and Spice Injection in the Eastern Subtropical North Atlantic. *J. Phys. Oceanogr.*, 45(2):504–525, Feb 2015. ISSN 1520-0485. doi: 10.1175/jpo-d-14-0042.1.
- Christian Kummerow, Y. Hong, W. S. Olson, S. Yang, R. F. Adler, J. McCollum, R. Ferraro, G. Petty, D-B. Shin, and T. T. Wilheit. The Evolution of the Goddard Profiling Algorithm (GPROF) for Rainfall Estimation from Passive Microwave Sensors. J. Appl. Meteorol., 40(11): 1801–1820, 2001. doi: 10.1175/1520-0450(2001)040(1801:TEOTGP)2.0.CO;2.